


Specification Sheet

Part Number: 111-01389

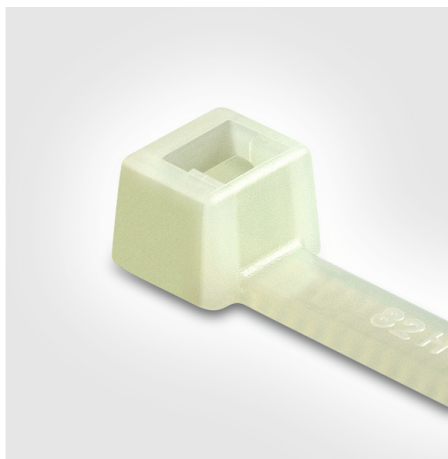

The tie contains a dual locking design to secure two bundles at once. Head design can also provide spacing between parallel bundles.

Bent tail allows for quick insertion into head.

Double-Head Cable Tie, 8.3" Long, 50lb Tensile Strength, PA66, Natural, 50/pkg

Article Number 111-01389

Type T50R

Color Natural (NA)

Quantity Per bag

Product Description T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

Short Description Double-Head Cable Tie, 8.3" Long, 50lb Tensile Strength, PA66, Natural, 50/pkg

Global Part Name T50R-PA66-NA

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225.0

Length L (Imperial) 8.0

Length L (Metric) 203.2

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.18

Width W (Metric) 4.6

Bundle Diameter Min (Imperial) 0.06

Bundle Diameter Min (Metric) 1.6

Bundle Diameter Max (Imperial) 1.5

Bundle Diameter Max (Metric) 38.0

Bundle Diameter 1st Loop Max (Imperial) 1.7

Bundle Diameter 1st Loop Max (Metric)	44.4
Bundle Diameter 2nd Loop Max (Imperial)	0.75
Bundle Diameter 2nd Loop Max (Metric)	19.0
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
US MIL SPEC	SAE-AS33671 MS3367-1-9, Class 1
Flammability	UL 94 V-2
Halogen Free	Yes
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
ROHS Compliant	Yes
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity (Imperial)	50
Package Quantity (Metric)	50

Customs Number

3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)