


## Specification Sheet

Part Number: 111-85460

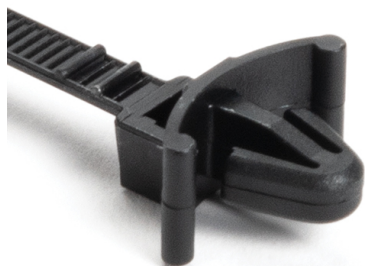

Wing design helps stabilize the tie in high vibration applications

Includes a ladder type strap as opposed to a conventional serrated strap; providing the benefit of being extra flexible.

Design of tie provides low insertion and high extraction force.

1-Pc Cable Tie/Arrowhead Mount w/Wings, 6.5"L, 50lb, 0.25 - 0.3" Hole Dia, PA66, Black, 500/bag

**Article Number** 111-85460

**Type** T50SL6

**Color** Black (BK)

**Quantity Per** pcs.

**Product Description** Wing design helps stabilize the tie in high vibration applications. One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.

**Short Description** 1-Pc Cable Tie/Arrowhead Mount w/Wings, 6.5"L, 50lb, 0.25 - 0.3" Hole Dia, PA66, Black, 500/bag

**Global Part Name** T50SL6-PA66-BK

**Minimum Tensile Strength (Imperial)** 50.0

**Minimum Tensile Strength (Metric)** 225

**Length L (Imperial)** 6.5

**Length L (Metric)** 165

**Fixation Method** Arrowhead

**Identification Plate Position** none

**Releasable Closure** No

**Tie Closure** plastic pawl

**Variant** Inside Serrated

**Width W (Imperial)** 0.18

**Width W (Metric)** 4.6

**Bundle Diameter Min (Imperial)** 0.06

**Bundle Diameter Min (Metric)** 1.5

**Bundle Diameter Max (Imperial)** 1.3

**Bundle Diameter Max (Metric)** 34.0

<b>Thickness T (Metric)</b>	1.2
<b>Panel Thickness Min (Imperial)</b>	0.019
<b>Panel Thickness Max (Imperial)</b>	0.098
<b>Panel Thickness Min (Metric)</b>	0.5
<b>Panel Thickness Max (Metric)</b>	2.5
<b>Mounting Hole Diameter D (Imperial)</b>	0.25 - 0.3
<b>Mounting Hole Diameter D (Metric)</b>	6.3 - 7.5 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	7.5
<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2
<b>Operating Temperature</b>	-40°F to +185°F (-40°C to +85°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes

**Package Quantity (Imperial)** 500

**Package Quantity (Metric)** 500

**Customs Number** 3926909988