


Specification Sheet

Part Number: T50LDH0HSM4

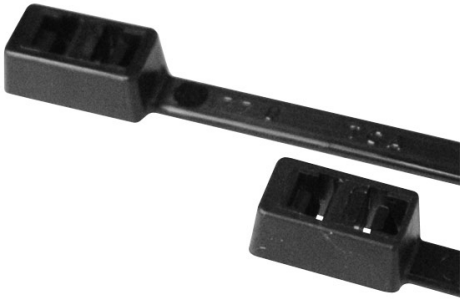

Double-Head Cable Tie, 15.6" Long, 50lb Tensile Strength, PA66HS, Black, 1000/pkg

Article Number 117-05404

Type T50LDH

Color Black (BK)

Features & Benefits

- The tie contains a dual locking design to secure two bundles at once.
- Head design can also provide spacing between parallel bundles.
- Bent tail allows for quick insertion into head.

Quantity Per bag

Product Description

The double head cable tie was designed with a dual locking head that creates two loops to secure two bundles simultaneously. The head also provides separation between bundles or bundles running parallel to each other. The bent tail design allows quick and simple installations by hand. For high volume applications, tensioning tools are available to ensure consistent and safe installation.

Short Description	Double-Head Cable Tie, 15.6" Long, 50lb Tensile Strength, PA66HS, Black, 1000/pkg
Global Part Name	T50LDH-PA66HS-BK
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	15.6
Length L (Metric)	395.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.19
Width W (Metric)	4.7
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.6
Bundle Diameter Max (Imperial)	4.0

Bundle Diameter Max (Metric)	101.6
Bundle Diameter 1st Loop Max (Imperial)	4.0
Bundle Diameter 1st Loop Max (Metric)	101.6
Bundle Diameter 2nd Loop Max (Imperial)	2.0
Bundle Diameter 2nd Loop Max (Metric)	50.8
Thickness T (Metric)	1.4

Material Polyamide 6.6 heat stabilized (PA66HS)

Material Shortcut PA66HS

Flammability UL 94 V2

Halogen free Yes

Operating Temperature (Metric) -40°F to +257°F (-40°C to +125°C)

ROHS Complaint Yes

Certification/Specification WEB UL-ZODZ2.E64139

UL Recognized (US) Yes

UL Recognized (US and Canada) Yes

Use Conditions For Indoor Use Only

Package Quantity(Imperial) 1000

Package Quantity (Metric) 1000

Customs Number 3926909988

Content Unit(BMEcat) pcs.