


## Specification Sheet

Part Number: 126-00082

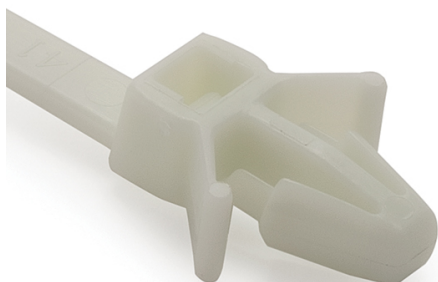

1-Pc Cable Tie/Arrowhead Mount w/Wings, 6"L, 50lb, 0.24 - 0.26" Hole Dia, PA66HIRHS, Natural, 500/bag

**Article Number** 126-00082

**Type** T50SSFM

**Color** Natural (NA)

**Features & Benefits**

- Two piece assembly allows the mount to slide along the strap ensuring proper orientation.
- Arrowhead style mount provides low insertion and high extraction force.
- Arrowhead disc protects against dirt and other impurities.

**Quantity Per** bag

<b>Product Description</b>	Wing design helps stabilize the tie in high vibration applications. One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.
<b>Short Description</b>	1-Pc Cable Tie/Arrowhead Mount w/Wings, 6"L, 50lb, 0.24 - 0.26" Hole Dia, PA66HIRHS, Natural, 500/bag
<b>Global Part Name</b>	T50SSFM-PA66HIRHS-NA
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	225.0
<b>Length L (Imperial)</b>	6.3
<b>Length L (Metric)</b>	160.0
<b>Fixation Method</b>	Arrowhead
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Variant</b>	Inside Serrated
<b>Width W (Imperial)</b>	0.18
<b>Width W (Metric)</b>	4.6

<b>Bundle Diameter Min (Imperial)</b>	0.13
<b>Bundle Diameter Min (Metric)</b>	3.2
<b>Bundle Diameter Max (Imperial)</b>	1.38
<b>Bundle Diameter Max (Metric)</b>	35.0
<b>Height H (Imperial)</b>	0.2
<b>Height H (Metric)</b>	5.6
<b>Panel Thickness Min(Imperial)</b>	0.028
<b>Panel Thickness Max(Imperial)</b>	0.12
<b>Panel Thickness Min (Metric)</b>	0.7
<b>Panel Thickness Max (Metric)</b>	3.0
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 " - 0.26
<b>Mounting Hole Diameter D (Metric)</b>	6.0 - 6.6 mm
<b>Mounting Hole Diameter D Min (Imperial)</b>	0.24
<b>Mounting Hole Diameter D Max (Imperial)</b>	0.26
<b>Mounting Hole Diameter D Max (Metric)</b>	6.6

<b>Material</b>	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature (Metric)</b>	-40°F to +230°F (-40°C to +110°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	500
<b>Package Quantity (Metric)</b>	500
<b>Customs Number</b>	3926909988
<b>Content Unit(BMEcat)</b>	pcs.