


## Specification Sheet

Part Number: 132-00009

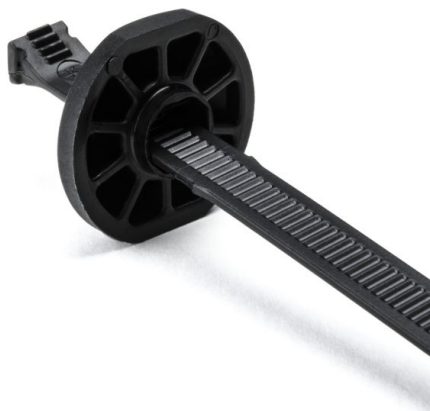

Unique two piece tie allows parallel entry and exit through the head for easy assembly.

High impact, heat stabilized material gives strength needed for trucking and heavy equipment applications.

Button Head Cable Tie with Retainers and Pilot Bushings, 15.0" Long, PA66HIRHSUV, Black, 50/pkg

**Article Number** 132-00009

**Type** BT130LDP

**Color** Black (BK)

**Quantity Per** bag

**Product Description** The button head tie is a two piece tie providing for parallel entry and exit through the head. The strap contains serrations on both sides, and has two opposed pawls recessed within a domed head. This design allows the strap to be directed clockwise or counter-clockwise prior to insertion into the head, enabling bi-directional looping.

**Short Description** Button Head Cable Tie with Retainers and Pilot Bushings, 15.0" Long, PA66HIRHSUV, Black, 50/pkg

**Global Part Name** BT130LDP-PA66HIRHSUV-BK

**Minimum Tensile Strength (Imperial)** 130.0

**Minimum Tensile Strength (Metric)** 578.0

**Length L (Imperial)** 15.0

**Length L (Metric)** 381.5

**Fixation Method** Connector Clip

**Identification Plate Position** none

**Releasable Closure** No

**Tie Closure** plastic pawl

**Variant** Outside Serrated

**Width W (Imperial)** 0.3

**Width W (Metric)** 7.6

**Bundle Diameter Min (Imperial)** 0.25

**Bundle Diameter Min (Metric)** 6.4

**Bundle Diameter Max (Imperial)** 4.33

**Bundle Diameter Max (Metric)** 110.0

<b>Mounting Hole Diameter D (Metric)</b>	25.4 mm
<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Material Head</b>	Polyamide 6.6 heat stabilized (PA66HS)
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Package Quantity (Imperial)</b>	50
<b>Package Quantity (Metric)</b>	50
<b>Customs Number</b>	3926909988