


## Specification Sheet

Part Number: 132-00034

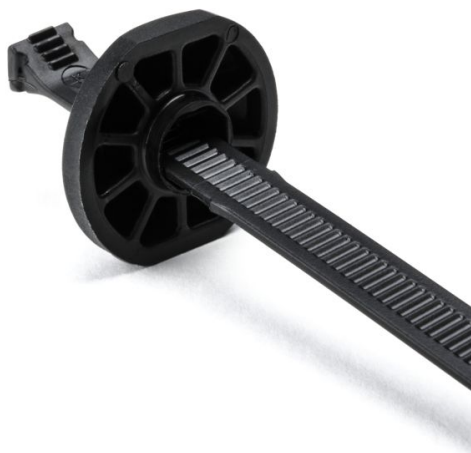

Button Head Cable Tie with Retainers and Pilot Bushings, 15.0" Long, PA66HIRHSUV, Black, 2000/pkg

Article Number	132-00034
Type	BT130LDP
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none"><li>• Unique two piece tie allows parallel entry and exit through the head for easy assembly.</li><li>• High impact, heat stabilized material gives strength needed for trucking and heavy equipment applications.</li></ul>
Quantity Per	carton

### Product Description

The button head tie is a two piece tie providing for parallel entry and exit through the head. The strap contains serrations on both sides, and has two opposed pawls recessed within a domed head. This design allows the strap to be directed clockwise or counter-clockwise prior to insertion into the head, enabling bi-directional looping.

<b>Short Description</b>	Button Head Cable Tie with Retainers and Pilot Bushings, 15.0" Long, PA66HIRHSUV, Black, 2000/pkg
<b>Global Part Name</b>	BT130LDP-PA66HIRHSUV-BK
<b>Minimum Tensile Strength (Imperial)</b>	130
<b>Minimum Tensile Strength (Metric)</b>	578
<b>Length L (Imperial)</b>	15.0
<b>Length L (Metric)</b>	381.5
<b>Fixation Method</b>	Connector Clip
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Variant</b>	Outside Serrated
<b>Width W (Imperial)</b>	0.3
<b>Width W (Metric)</b>	7.6
<b>Bundle Diameter Min (Imperial)</b>	0.06
<b>Bundle Diameter Min (Metric)</b>	1.5
<b>Bundle Diameter Max (Imperial)</b>	4.3

<b>Bundle Diameter Max (Metric)</b>	110.0
<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Material Head</b>	Polyamide 6.6 heat stabilized (PA66HS)
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature (Metric)</b>	-40°F to +185°F (-40°C to +85°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>Package Quantity(Imperial)</b>	2000
<b>Package Quantity (Metric)</b>	2000
<b>Customs Number</b>	3926909988