


## Specification Sheet

Part Number: 150-55500

An all-in-one bundling and mounting solution that reduces parts and costs.

High-specification materials and superior design suit the bundling and fastening requirements of complex applications.

Release feature allows maintenance or changeouts as needed.

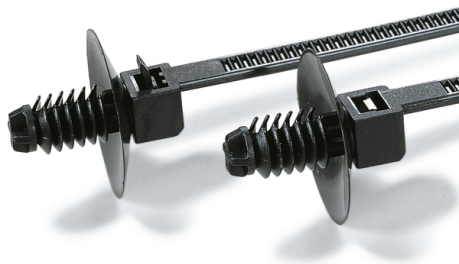

1-Piece Cable Tie/Fir Tree Mount, 6.7" Long, 0.25 - 0.28" Mounting Hole Diameter, PA66, Black, 500/pkg

Article Number 150-55500

Type REL30SDP6

Color Black (BK)

Quantity Per bag

Product Description The releasable cable tie with fir tree mount offers a complete bundling and fastening solution. The extended pawl allows the user to release the tie for bundle maintenance. HellermannTyton's one-piece mounting ties deliver the ideal combination of high-specification materials and superior design.

Short Description 1-Piece Cable Tie/Fir Tree Mount, 6.7" Long, 0.25 - 0.28" Mounting Hole Diameter, PA66, Black, 500/pkg

Global Part Name REL30SDP6-PA66-BK

Minimum Tensile Strength (Imperial)	30
Minimum Tensile Strength (Metric)	135
Length L (Imperial)	6.7
Length L (Metric)	170.0
Fixation Method	Fir tree for round holes
Identification Plate Position	none
Releasable Closure	Yes
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.2
Width W (Metric)	5.0
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	1.2
Bundle Diameter Max (Metric)	31.0
Thickness T (Imperial)	0.06

Thickness T (Metric)	1.5
Height H (Imperial)	0.5
Panel Thickness Min (Imperial)	0.12
Panel Thickness Max (Imperial)	0.28
Panel Thickness Min (Metric)	3.0
Panel Thickness Max (Metric)	7.0
Mounting Hole Diameter D (Imperial)	0.25 - 0.28
Mounting Hole Diameter D (Metric)	6.3 - 7.1 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.1
Disc Diameter (Metric)	22.0
Disc Diameter (Imperial)	0.87

Material Polyamide 6.6 (PA66)

Material Shortcut PA66

Flammability	UL 94 V-2
UV Resistant (Yes/No)	No
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 40 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)   [RoHS/WEEE Compliance](#)   [Disclaimer](#)   [Terms and Conditions](#)