


## Specification Sheet

Part Number: 150-55500

An all-in-one bundling and mounting solution that reduces parts and costs.

High-specification materials and superior design suit the bundling and fastening requirements of complex applications.

Release feature allows maintenance or changeouts as needed.

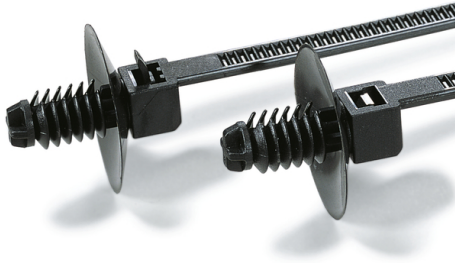

1-Piece Cable Tie/Fir Tree Mount, 6.7" Long, Mounting Hole Diameter 0.25" - 0.28", PA66, Black, 500/pkg

Article Number 150-55500

Type REL30SDP6

Color Black (BK)

Quantity Per bag

Product Description The releasable cable tie with fir tree mount offers a complete bundling and fastening solution. The extended pawl allows the user to release the tie for bundle maintenance. HellermannTyton's one-piece mounting ties deliver the ideal combination of high-specification materials and superior design.

Short Description 1-Piece Cable Tie/Fir Tree Mount, 6.7" Long, Mounting Hole Diameter 0.25" - 0.28", PA66, Black, 500/pkg

Global Part Name REL30SDP6-PA66-BK

Minimum Tensile Strength (Imperial) 30.0

Minimum Tensile Strength (Metric) 135

Length L (Imperial) 6.7

Length L (Metric) 170.0

Fixation Method Fir Tree

Identification Plate Position none

Releasable Closure Yes

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.2

Width W (Metric) 5.0

Bundle Diameter Min (Imperial) 0.06

Bundle Diameter Min (Metric) 1.5

Bundle Diameter Max (Imperial) 1.2

Bundle Diameter Max (Metric) 31.0

Thickness T (Imperial)	0.06
Thickness T (Metric)	1.5
Height H (Imperial)	0.5
Panel Thickness Min (Imperial)	0.12
Panel Thickness Max (Imperial)	0.28
Panel Thickness Min (Metric)	3.0
Panel Thickness Max (Metric)	7.0
Mounting Hole Diameter D (Imperial)	0.25 - 0.28
Mounting Hole Diameter D (Metric)	6.3 - 7.1 mm
Mounting Hole Diameter D Min (Imperial)	0.25
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.1
Disc Diameter (Metric)	22.0
Disc Diameter (Imperial)	0.87

Material Polyamide 6.6 (PA66)

Material Shortcut	PA66
Flammability	UL 94 V-2
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988