


Specification Sheet

Part Number: 151-00785

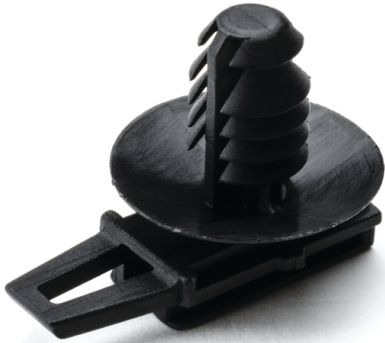

HellermannTyton connector clips provide a simple and easy method for mounting connectors to a mounting surface in a variety of applications. Detailed designs include anti-rattle disc features, anti-rotation oval fir trees, and clamps for mounting on edges.

HellermannTyton offers an assortment of connector clips that are available for a variety of connector slot designs found on most of the largest global connector manufacturers.

Conn. Clip w/Fir Tree, 0.7 - 4.0 mm Panel Thick., 6.0 - 6.7 mm Hole Dia., PA66HIRHS, Black, 5000/box

Article Number 151-00785

Type CCFT6LG

Color Black (BK)

Quantity Per bag

Product Description Connector Clips feature various attachment point configurations to accommodate the many connectors on the market. They are first mated with a connector on a wire harness or cable assembly, then secured to a surface using the integrated mount. With so many configurations available, attachment surfaces can be a hole, edge, stud or even another harness assembly.

| | |
|--|--|
| Short Description | Conn. Clip w/Fir Tree, 0.7 - 4.0 mm Panel Thick., 6.0 - 6.7 mm Hole Dia., PA66HIRHS, Black, 5000/box |
| Global Part Name | CCFT6LG-PA66HIRHS-BK |
| Technical Description | Connector Clip, Black |
| Fixation Method | Fir Tree |
| Variant | 6.1 - 6.9 mm |
| Height H (Metric) | 17.0 |
| Panel Thickness Min (Imperial) | 0.028 |
| Panel Thickness Max (Imperial) | 0.16 |
| Panel Thickness Min (Metric) | 0.7 |
| Panel Thickness Max (Metric) | 4.0 |
| Mounting Hole Diameter D (Imperial) | 0.24 - 0.26 |
| Mounting Hole Diameter D (Metric) | 6.0 - 6.7 mm |
| Mounting Hole Diameter D Min (Imperial) | 0.24 |
| Mounting Hole Diameter D Max (Imperial) | 0.26 |
| Mounting Hole Diameter D Max (Metric) | 6.7 |

| | |
|-------------------------------------|--|
| Material | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut | PA66HIRHS |
| Flammability | UL 94 HB |
| Operating Temperature | -40°F to +221°F (-40°C to +105°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 5000 |
| Package Quantity (Metric) | 5000 |
| Customs Number | 3926909988 |