


## Specification Sheet

Part Number: 151-01888

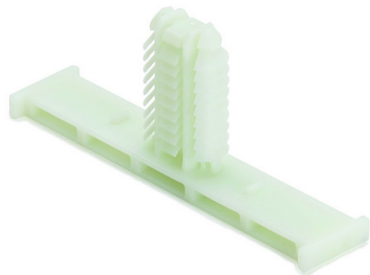

Bundling Clip w/Oval Fir Tree, 2.28" L, 0.02 - 0.43" Panel Thickness, PA66HIRHS, Natural, 3000/ctn

<b>Article Number</b>	151-01888
<b>Type</b>	BCFTOVALXL
<b>Color</b>	Natural (NA)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>• The different fixing orientations allow tape clips to be used with a wide range of panel thicknesses and hole diameters.</li></ul>
<b>Quantity Per</b>	carton
<b>Product Description</b>	HellermannTyton Bundling Clips are designed to provide simple and easy methods for securing cable bundles, hoses, or pipes. They are fastened onto the tape bar using tape or cable ties.
<b>Short Description</b>	Bundling Clip w/Oval Fir Tree, 2.28" L, 0.02 - 0.43" Panel Thickness, PA66HIRHS, Natural, 3000/ctn

**Global Part Name**

BCFTOVALXL-PA66HIRHS-NA

**Length L (Imperial)**

2.28

**Length L (Metric)**

58.0

**Fixation Method**

Fir Tree for oval holes

**Height H (Imperial)**

0.97

**Height H (Metric)**

24.58

**Panel Thickness Min (Imperial)**

0.02

**Panel Thickness Max (Imperial)**

0.43

**Panel Thickness Min (Metric)**

0.6

**Panel Thickness Max (Metric)**

11.0

**Mounting Hole Diameter D (Imperial)**

0.24 x 0.48 " 0.25 x 0.50 " 0.25 x 0.50 " 0.27 x 0.47

**Mounting Hole Diameter D (Metric)**

6.2 x 12.2 mm 7.0 x 12.0 mm 6.5 x 13.0 mm 6.5 x 12.5 mm

**Mounting Hole Diameter D Min (Imperial)**

0.24

**Mounting Hole Diameter D Max (Imperial)**

0.51

**Mounting Hole Diameter D Max (Metric)**

13.0

<b>Material</b>	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature</b>	-40°F to +230°F (-40°C to +110°C)
<b>Package Quantity (Imperial)</b>	3000
<b>Package Quantity (Metric)</b>	3000
<b>Customs Number</b>	3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)