


## Specification Sheet

Part Number: 151-02806

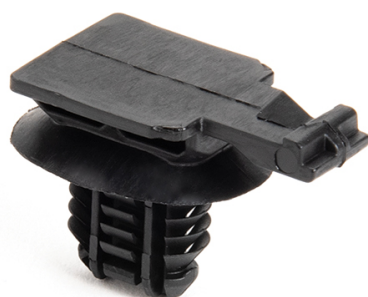

USCAR Conn Clip w/Oval Fir Tree, 17mm, 0.6-6.75mm Panel Thickness, PA66HIRHSUV, Black, 3,000/ctn

**Article Number**

151-02806

**Type**

CC17FTOVAL

**Color**

Black (BK)

**Features & Benefits**

- HellermannTyton connector clips provide a simple and easy method for mounting connectors to a mounting surface in a variety of applications.
- Detailed designs include anti-rattle disc features, anti-rotation oval fir trees, and clamps for mounting on edges.
- HellermannTyton offers an assortment of connector clips that are available for a variety of connector slot designs found on most of the largest global connector manufacturers.

**Quantity Per**

box

**Product Description**

Connector Clips feature various attachment point configurations to accommodate the many connectors on the market. They are first mated with a connector on a wire harness or cable assembly, then secured to a surface using the integrated mount. With so many configurations available, attachment surfaces can be a hole, edge, stud or even another harness assembly.

<b>Short Description</b>	USCAR Conn Clip w/Oval Fir Tree, 17mm, 0.6-6.75mm Panel Thickness, PA66HIRHSUV, Black, 3,000/ctn
<b>Global Part Name</b>	CC17FTOVAL-PA66HIRHSUV-BK
<b>Length L (Imperial)</b>	1.287
<b>Length L (Metric)</b>	32.7
<b>Fixation Method</b>	Fir Tree
<b>Width W (Imperial)</b>	0.716
<b>Width W (Metric)</b>	18.2
<b>Height H (Imperial)</b>	0.829
<b>Height H (Metric)</b>	21.08
<b>Mounting Hole Diameter D (Imperial)</b>	0.244 X 0.48 " 0.255 X 0.492 " 0.255 X 0.511 " 0.275 X 0.472
<b>Mounting Hole Diameter D (Metric)</b>	6.2 x 12.2 mm 6.5 x 12.5 mm 7.0 x 12.0 mm 6.5 x 13.0 mm
<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Operating Temperature (Metric)</b>	-40°F to +230°F (-40°C to +110°C)

**Package Quantity(Imperial)**

3000

**Package Quantity (Metric)**

3000