


## Specification Sheet

Part Number: 151-02996

Once installed, perpendicular arrowhead arms reduce movement and will not collapse when exposed to water or load. Integrated dual seal meets IP65 for protection against water, dust, chemicals, air and sound. Superior design and high-spec materials maintain routing position to deliver consistent performance in the most rugged applications. Low-profile design saves 5 mm of height when installed. Sealed arrowhead meets USCAR44 push in, pull off and sealing standards.

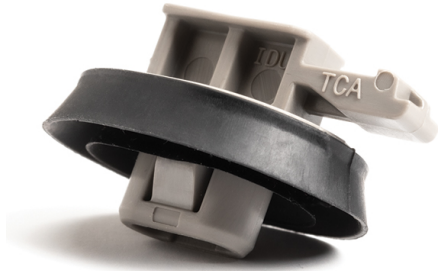

Conn. Clip w/Oval Arrowhead, 1.2-1.8mm Panel Thick., 6.5x12.5mm Oval, PA66HIRHS/TPE, Black, 4000/ctn

<b>Article Number</b>	151-02996
<b>Type</b>	SAHOVAL1.4TCC7
<b>Color</b>	Black (BK) Gray (GY)
<b>Quantity Per</b>	box
<b>Product Description</b>	HellermannTyton sealed clips and ties are constructed of engineered nylon with a dual TPE (thermo plastic elastomer) seal. The combination of dual seal and engineered arrowhead provide superior sealing performance for applications where protection from moisture and debris is essential.
<b>Short Description</b>	Conn. Clip w/Oval Arrowhead, 1.2-1.8mm Panel Thick., 6.5x12.5mm Oval, PA66HIRHS/TPE, Black, 4000/ctn

<b>Global Part Name</b>	SAHOVAL1.4TCC7-PA66HIRHS/TPE-BK/GY
<b>Length L (Imperial)</b>	1.07
<b>Length L (Metric)</b>	27.28
<b>Fixation Method</b>	Arrowhead for oval holes
<b>Variant</b>	6.2 x 12.2 mm 6.5 x 12.5 mm 6.5 x 13.0 mm
<b>Width W (Imperial)</b>	0.89
<b>Width W (Metric)</b>	22.78
<b>Bundle Diameter Max (Imperial)</b>	1.97
<b>Height H (Imperial)</b>	0.69
<b>Height H (Metric)</b>	17.55
<b>Panel Thickness Min (Imperial)</b>	0.05
<b>Panel Thickness Max (Imperial)</b>	0.07
<b>Panel Thickness Min (Metric)</b>	1.2
<b>Panel Thickness Max (Metric)</b>	1.8
<b>Mounting Hole Diameter D (Imperial)</b>	0.25 x 0.49 " 0.25 x 0.51 " 0.27 x 0.47
<b>Mounting Hole Diameter D (Metric)</b>	6.5 x 13.0 mm 6.2 x 12.2 mm 6.5 x 12.5 mm

<b>Material</b>	Thermoplastic Elastomer (TPE) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS TPE
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C)
<b>Reach Compliant (Article 33)</b>	No
<b>Package Quantity (Imperial)</b>	4000
<b>Package Quantity (Metric)</b>	4000

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)