

Specification Sheet


Part Number: 151-03013

One-piece ratchet closure design allows for easy installation during pre- or final assembly.

Easy release feature allows for quick adjustments and maintenance.

Steel mounting plate tolerates high torque mounting and is treated to resist chemicals and salt spray.

NFPA 130-compliant to streamline inspections.

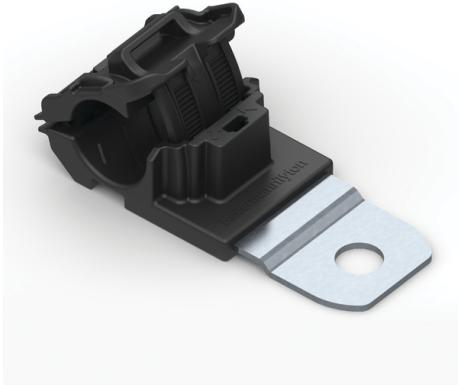

Ratchet P-Clamp, 0.52 - 0.77" Bundle Dia, 180° Short, 0.33" Hole Dia, PA666V0/ST/ZN, Black, 280/ctn

Article Number 151-03013

Type RCB180SM8

Color Black (BK)

Quantity Per bag

Product Description

The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The nondestructive release feature allows the clamp to be reused without removing or replacing any bolts or screws. Low fire hazard material is designed specifically for rail applications.

Short Description	Ratchet P-Clamp, 0.52 - 0.77" Bundle Dia, 180° Short, 0.33" Hole Dia, PA666V0/ST/ZN, Black, 280/ctn
Global Part Name	RCB180SM8-PA666V0/ST/ZN-BK
Minimum Tensile Strength (Imperial)	100.0
Minimum Tensile Strength (Metric)	445.0
Length L (Imperial)	4.58
Length L (Metric)	116.2
Fixation Method	Screw Mounting
Variant	Single-lobe clamp
Width W (Imperial)	1.37
Width W (Metric)	34.9
Bundle Diameter Min (Imperial)	0.5
Bundle Diameter Min (Metric)	12.7
Bundle Diameter Max (Imperial)	0.77
Bundle Diameter Max (Metric)	19.5
Mounting Hole Diameter D (Imperial)	0.33

Mounting Hole Diameter D (Metric)	8.4 mm
Stud Diameter (Metric)	M8
Mounting Hole Centers (Imperial)	2.08
Material	Zinc plated (ZN) Steel (ST) Polyamide 6.6/6, V0 (PA666V0)
Material Shortcut	ZN PA666V0 ST
Flammability	UL 94 V-0 Limited fire hazard Low generation of toxic gases and corrosive acid Low smoke generation Halogen-free
Halogen Free	Yes
UV Resistant (Yes/No)	Yes
Operating Temperature	-40°F to +248°F (-40°C to +120°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	ASTM 1354 EN 45545 ASTM E 162 ASTM E 662
Package Quantity (Imperial)	280
Package Quantity (Metric)	280

© 2022 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)