

Specification Sheet


Part Number: 151-03015

One-piece ratchet closure design allows for easy installation during pre- or final assembly.

Easy release feature allows for quick adjustments and maintenance.

Zinc-plated steel mounting plate tolerates high torque mounting and is treated to resist chemicals and salt spray.

NFPA 130-compliant to streamline inspections.

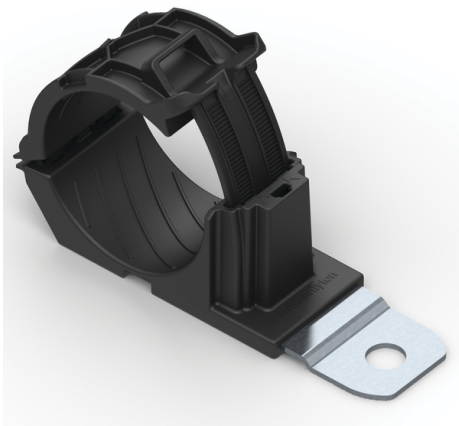

Ratchet P-Clamp, 1.38 - 2.01" Bundle Dia, 180° Short, 0.33" Hole Dia, PA666V0/ST/ZN, Black, 160/ctn

Article Number 151-03015

Type RCD180SM8

Color Black (BK)

Quantity Per bag

Product Description

The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The release feature provides easy and nondestructive removal of cables simply by using a flat-head screwdriver. This nondestructive release allows the clamp to be reused without removing or replacing any bolts or screws. Low fire hazard material is designed specifically for rail applications.

| | |
|-------------------------------------|---|
| Short Description | Ratchet P-Clamp, 1.38 - 2.01" Bundle Dia, 180° Short, 0.33" Hole Dia, PA666V0/ST/ZN, Black, 160/ctn |
| Global Part Name | RCD180SM8-PA666V0/ST/ZN-BK |
| Minimum Tensile Strength (Imperial) | 100.0 |
| Minimum Tensile Strength (Metric) | 445 |
| Length L (Imperial) | 7.15 |
| Length L (Metric) | 181.5 |
| Fixation Method | Screw Mounting |
| Variant | Short |
| Width W (Imperial) | 1.37 |
| Width W (Metric) | 34.9 |
| Bundle Diameter Min (Imperial) | 1.42 |
| Bundle Diameter Min (Metric) | 36.0 |
| Bundle Diameter Max (Imperial) | 2.0 |
| Bundle Diameter Max (Metric) | 51.0 |
| Mounting Hole Diameter D (Imperial) | 0.33 |
| Mounting Hole Diameter D (Metric) | 8.4 mm |

| | |
|----------------------------------|---|
| Stud Diameter (Metric) | M8 |
| Mounting Hole Centers (Imperial) | 2.76 |
| Material | Steel (ST) Zinc plated (ZN) Polyamide 6.6/6, V0 (PA666V0) |
| Material Shortcut | ST ZN PA666V0 |
| Flammability | UL 94 V-0 |
| Halogen Free | Yes |
| UV Resistant (Yes/No) | Yes |
| Operating Temperature | -40°F to +248°F (-40°C to +120°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Certification/Specification | ASTM E 162 ASTM 1354 EN [45545-2] ASTM E 662 |
| Package Quantity (Imperial) | 160 |
| Package Quantity (Metric) | 160 |
| Customs Number | 3926909988 |

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)