


## Specification Sheet

Part Number: 151-13601

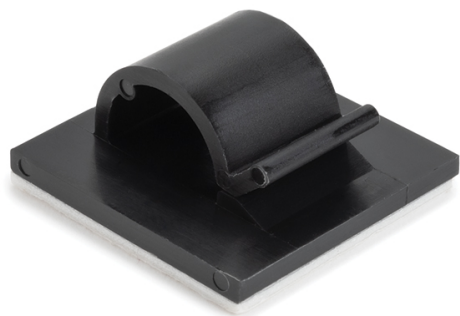

RB Adhesive Cable Clamp, 0.32" Max. Bundle Dia, PA66, Black, 100/pkg

<b>Article Number</b>	151-13601
<b>Type</b>	RB8
<b>Color</b>	Black (BK)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>•Simple snap-in design allows for quick and easy installation or removal of cables.</li><li>•Rubber based adhesive allows for a permanent bond to most surfaces.</li></ul>
<b>Quantity Per</b>	bag
<b>Product Description</b>	The RB Adhesive cable clamps are designed with an easy snap-in feature allowing simple installation or removal of cables, pipes or hoses. The rubber based adhesive allows for a permanent bond to most surfaces.

<b>Short Description</b>	RB Adhesive Cable Clamp, 0.32" Max. Bundle Dia, PA66, Black, 100/pkg
<b>Global Part Name</b>	RB8-PA66-BK
<b>Length L (Imperial)</b>	0.98
<b>Length L (Metric)</b>	25.0
<b>Fixation Method</b>	Pasting / Stick
<b>Variant</b>	Closed
<b>Width W (Imperial)</b>	1.0
<b>Width W (Metric)</b>	25.0
<b>Bundle Diameter Max (Imperial)</b>	0.31
<b>Bundle Diameter Max (Metric)</b>	8.0
<b>Height H (Imperial)</b>	0.45
<b>Height H (Metric)</b>	11.5
<b>Nominal Diameter (Imperial)</b>	5/16
<b>Nominal Diameter (Metric)</b>	8.0

<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Adhesive</b>	Synthetic rubber with base of polyethylene foam
<b>Flammability</b>	UL 94 V2 (excluding adhesive)
<b>UV Resistant (Yes/No)</b>	No
<b>Adhesive Operating Temperature</b>	-40°F to +140°F (-40°C to +60°C)
<b>Operating Temperature (Metric)</b>	-40°F to +140°F (-40°C to +60°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Use Conditions</b>	For Indoor Use Only
<b>Package Quantity(Imperial)</b>	100
<b>Package Quantity (Metric)</b>	100
<b>Customs Number</b>	3926909988
<b>Content Unit(BMEcat)</b>	pcs.
<b>Weight (Metric)</b>	2.36

---

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)