


Specification Sheet

Part Number: 156-00235

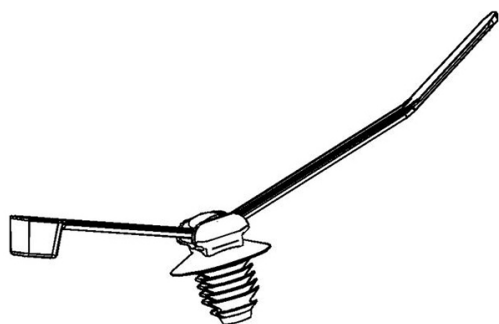

Fir Tree Mount/Cable Tie, 50lb, 7.9" Panel Thickness 1.5 mm - 4 mm, PA46, Gray, 1000/pkg

Article Number	156-00235
Type	T50RFT8GSD
Color	Gray (GY)
Features & Benefits	<ul style="list-style-type: none">• Staggered fir tree branch design provides low insertion forces and high extraction forces.• Initial fir tree serves as a locating feature for assistance in blind assembly applications.• Disc feature provides anti-rattle protection in high vibration applications.
Quantity Per	bag

Product Description

HellermannTyton's fir tree mounts provide a secure grip in a mounting hole and protect against dirt and other impurities. The mount can slide along the strap of the cable tie for proper orientation. The fir tree mounts are designed to provide a low insertion force and high extraction force. This mount is sold as an assembly with the cable tie.

Short Description	Fir Tree Mount/Cable Tie, 50lb, 7.9" Panel Thickness 1.5 mm - 4 mm, PA46, Gray, 1000/pkg
Global Part Name	T50RFT8GSD-PA46-GY
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	7.9
Length L (Metric)	202
Fixation Method	Fir Tree
Identification Plate Position	none
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.181
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.04
Bundle Diameter Min (Metric)	1.0
Bundle Diameter Max (Imperial)	1.77
Bundle Diameter Max (Metric)	45.0

Thickness T (Metric)	1.2
Height H (Imperial)	0.68
Height H (Metric)	17.2
Panel Thickness Min(Imperial)	0.06
Panel Thickness Max(Imperial)	0.16
Panel Thickness Min (Metric)	1.5
Panel Thickness Max (Metric)	4.0
Mounting Hole Diameter D (Imperial)	0.32 - 0.33
Mounting Hole Diameter D (Metric)	8.0 - 8.5 mm
Mounting Hole Diameter D Min (Imperial)	.32
Mounting Hole Diameter D Max (Imperial)	0.33
Mounting Hole Diameter D Max (Metric)	8.5
Disc Diameter(Metric)	16.0
Disc Diameter (Imperial)	0.63
Stud Length Min (Imperial)	0.38
Stud Length Min (Metric)	9.7

Material	Polyamide 4.6 (PA46)
Material Shortcut	PA46
Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +266°F (-40°C to +130°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Package Quantity(Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3926909988
Content Unit(BMEcat)	pcs.
Weight (Metric)	1.89