

## Specification Sheet

Part Number: 156-01546


Low-profile clip attaches easily to plastic and metal edges as thin as 0.5 mm and up to 2.5 mm without the need for a mounting hole.

Two designs allow bundles to be secured parallel or vertical to surface edges.

Provides low insertion force and high extraction force – ideal for assembly environments.

Two-piece assembly allows the mount to slide along the strap, ensuring proper orientation.

Cable tie is outside serrated to reduce bundle chafing.

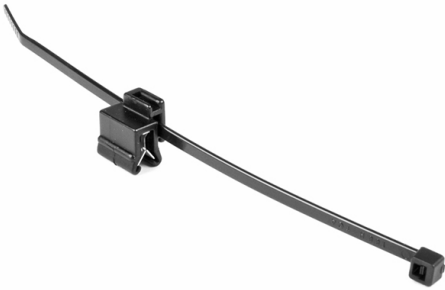

Cable Tie/Edge Clip, 5.7"L, 0.5–2.5 mm Panel, Perpendicular, 30lb, PA66HS/PA66HIRHS, BK, 500/pkg

**Article Number** 156-01546

**Type** T30ROSEC0.5-2.5SP-SVB

**Color** Black (BK)

**Quantity Per** bag

**Product Description** HellermannTyton's Two Piece Edge Clip with Cable Tie Assemblies are designed specifically to route bundles by securing them to the edge of a plastic or metal sheet without the need for a mounting hole. The clip is easy to secure and the extraction force is high due to the integrated metal clamp that holds the edge clip in place.

|  |  |
|--|--|
| <b>Short Description</b>                   | Cable Tie/Edge Clip, 5.7"L, 0.5–2.5 mm Panel, Perpendicular, 30lb, PA66HS/PA66HIRHS, BK, 500/pkg |
| <b>Global Part Name</b>                    | T30ROSEC0.5-2.5SP-SVB-PA66HS/PA66HIRHS-BK  |
| <b>Minimum Tensile Strength (Imperial)</b> | 30.0   |
| <b>Minimum Tensile Strength (Metric)</b>   | 133  |
| <b>Length L (Imperial)</b>                 | 5.7  |
| <b>Length L (Metric)</b>                   | 145.0  |
| <b>Fixation Method</b>                     | EdgeClip, sideways, assembled, 2 piece   |
| <b>Identification Plate Position</b>       | none   |
| <b>Variant</b>                             | Outside Serrated   |
| <b>Width W (Imperial)</b>                  | 0.13   |
| <b>Width W (Metric)</b>                    | 3.4  |
| <b>Bundle Diameter Min (Imperial)</b>      | 0.06   |
| <b>Bundle Diameter Min (Metric)</b>        | 1.6  |
| <b>Bundle Diameter Max (Imperial)</b>      | 1.38   |
| <b>Bundle Diameter Max (Metric)</b>        | 30.0   |

|                                       |  |
|---------------------------------------|--|
| <b>Height H (Imperial)</b>            | 0.05   |
| <b>Height H (Metric)</b>              | 1.2  |
| <b>Panel Thickness Min (Imperial)</b> | 0.01   |
| <b>Panel Thickness Max (Imperial)</b> | 0.1  |
| <b>Panel Thickness Min (Metric)</b>   | 0.5  |
| <b>Panel Thickness Max (Metric)</b>   | 2.5  |
| <b>Material</b>                       | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)<br>Polyamide 6.6 heat stabilized (PA66HS) |
| <b>Material Shortcut</b>              | PA66HIRHS PA66HS   |
| <b>Material Cable Tie</b>             | Polyamide 6.6 heat stabilized (PA66HS)   |
| <b>Flammability</b>                   | UL 94 HB   |
| <b>Operating Temperature</b>          | -40°F to +221°F (-40°C to +105°C)  |
| <b>Reach Compliant (Article 33)</b>   | Yes  |
| <b>ROHS Compliant</b>                 | Yes  |
| <b>Package Quantity (Imperial)</b>    | 500  |

**Package Quantity (Metric)**

500

**Customs Number**

3926909988

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)