


Specification Sheet

Part Number: 156-04004

Pre-assembled 2-piece fixing tie with coupler
Cable tie head can be moved after bundling

Easy addition of cables after assembly

For parallel routing of bundles that can be twisted 90° even after installation

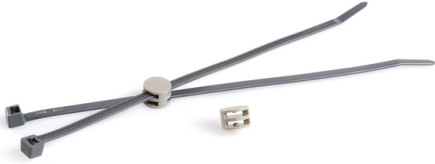

3-Pc Wide Strap Tie with Coupler, 15" Long, 0.39" - 4.13" Dia, 120lbs, PA46, Gray, 250/bag

Article Number 156-04004

Type T120RCOUPLER

Color Gray (GY)

Quantity Per carton

Product Description
The Coupler is the simple way to connect two cable ties for a parallel routing of two bundles. This special design allows the ties 90 degrees of rotation. This is ideal for all applications where the cable, pipe or hose should move flexible in relation to the fixing point. The Coupler can be used with one or two cable ties. This allows easily subsequent installation or replacements of further cables, pipes or hose.

Short Description
3-Pc Wide Strap Tie with Coupler, 15" Long, 0.39" - 4.13" Dia, 120lbs, PA46, Gray, 250/bag

Global Part Name T120RCOUPLER-PA46-GY

Minimum Tensile Strength (Imperial) 120.0

Minimum Tensile Strength (Metric) 535.0

Length L (Imperial) 14.96

Length L (Metric) 390.0

Identification Plate Position none

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.30

Width W (Metric) 7.6

Bundle Diameter Min (Imperial) 0.39

Bundle Diameter Min (Metric) 10.0

Bundle Diameter Max (Imperial) 4.13

Bundle Diameter Max (Metric) 105.0

Bundle Diameter 1st Loop Max (Imperial) 3.937

Bundle Diameter 1st Loop Max (Metric) 100.0

Bundle Diameter 2nd Loop Max (Imperial) 3.937

Bundle Diameter 2nd Loop Max (Metric) 100.0

Cable Tie Width Max (Imperial) 0.3

Cable Tie Width Max (Metric) 7.62

Material Polyamide 4.6 (PA46)

Material Shortcut PA46

Operating Temperature -40°F to +266°F (-40°C to +130°C)

ROHS Compliant Yes

Package Quantity (Imperial) 250

Package Quantity (Metric) 250