


Specification Sheet

Part Number: 156-04005

Pre-assembled 2-piece self-affixing tie with coupler
Cable tie head can be moved after bundling

Easy addition of cables after assembly

For parallel routing of bundles that can be twisted 90° even after installation

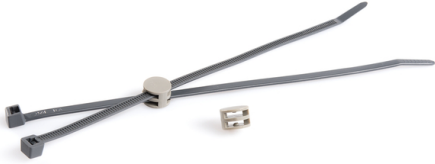

3-Pc T50R Tie with Coupler, 8" Long, 0.08" - 1.97" Dia, 50lbs, PA46, Gray, 500/bag

Article Number	156-04005
Type	T50RCOUPLER
Color	Gray (GY)
Quantity Per	bag

Product Description

The Coupler is the simple way to connect two cable ties for a parallel routing of two bundles. His special design allows the ties 90 degrees of rotation. This is ideal for all applications where the cable, pipe or hose should move flexible in relation to the fixing point. The Coupler can be used with one or two cable ties. This allows easily subsequent installation or replacements of further cables, pipes or hose.

Short Description

3-Pc T50R Tie with Coupler, 8" Long, 0.08" - 1.97" Dia, 50lbs, PA46, Gray, 500/bag

Global Part Name T50RCOUPLER-PA46-GY

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225.0

Length L (Imperial) 7.874

Length L (Metric) 202.0

Identification Plate Position none

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.18

Width W (Metric) 4.6

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 47.0

Bundle Diameter 1st Loop Max (Imperial) 1.97

Bundle Diameter 1st Loop Max (Metric) 50.0

Bundle Diameter 2nd Loop Max (Imperial)	1.97
Bundle Diameter 2nd Loop Max (Metric)	50.0
Cable Tie Width Max (Imperial)	0.185
Cable Tie Width Max (Metric)	4.70

Material Polyamide 4.6 (PA46)

Material Shortcut PA46

Material Cable Tie Polyamide 4.6 (PA46)

Flammability UL 94 V-2

Operating Temperature -40°F to +266°F (-40°C to +130°C)

ROHS Compliant Yes

Package Quantity (Imperial) 500

Package Quantity (Metric) 500

