

Specification Sheet

Part Number: 156-04066


Pre-assembled 2-piece fixing tie with fir tree foot part.
Cable tie head can be moved after bundling.

Easy to assemble without the need for a tool.

Disc adjusts tie for pressure from various directions and minimises access of dust and dirt.

Fir tree foot part can be used for a variety of panel thicknesses.

Suitable for use within threaded holes.

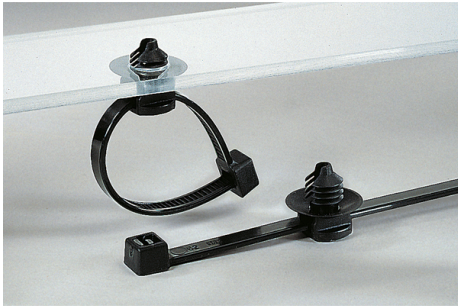

2-Pc Cable Tie/Arrowhead Mount, 8.0"L, 6.1-6.9mm Mounting Hole Dia, PA66HIRHS/UV, BK/OG, 1000/CTN

Article Number

156-04066

Type

T50RX2DUALSDSeal6.5A

Color

Black (BK) Orange (OG), High Voltage (HV)

Quantity Per

carton

Product Description

These two-piece self-affixing cable ties are supplied ready assembled and offer a simple and versatile method of bundling and fastening cables. The deep-hole anchor will easily push into blind holes with or without thread and offers a very secure attachment. The two-piece design enables the head of the tie to be oriented to the required position to ease assembly, while the disc on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

| | |
|--------------------------------|---|
| Short Description | 2-Pc Cable Tie/Arrowhead Mount, 8.0"L, 6.1-6.9mm Mounting Hole Dia, PA66HIRHS/UV, BK/OG, 1000/CTN |
| Global Part Name | T50RX2DUALSDSeal6.5A-PA66HIRHS/PA66HIRHSUV/TPE-OG/BK |
| Length L (Imperial) | 1.81 |
| Length L (Metric) | 46 |
| Fixation Method | Fir Tree |
| Identification Plate Position | none |
| Tie Closure | plastic pawl |
| Width W (Imperial) | 1.12 |
| Width W (Metric) | 28.48 |
| Bundle Diameter Min (Imperial) | 0.6 |
| Bundle Diameter Min (Metric) | 1.5 |
| Bundle Diameter Max (Imperial) | 1.9 |
| Bundle Diameter Max (Metric) | 50.0 |
| Height H (Imperial) | 0.64 |
| Height H (Metric) | 16.24 |

| | |
|---|---|
| Panel Thickness Min (Imperial) | 0.02 |
| Panel Thickness Max (Imperial) | 0.04 |
| Panel Thickness Min (Metric) | 0.60 |
| Panel Thickness Max (Metric) | 1.1 |
| Mounting Hole Diameter D (Imperial) | 0.24 - 0.27 |
| Mounting Hole Diameter D (Metric) | 6.1 - 6.9 mm |
| Mounting Hole Diameter D Min (Imperial) | 0.24 |
| Mounting Hole Diameter D Max (Imperial) | 0.27 |
| Mounting Hole Diameter D Max (Metric) | 6.9 |
| Material | Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) Thermoplastic Elastomer (TPE) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut | TPE PA66HIRHSUV PA66HIRHS |
| Material Cable Tie | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Flammability | UL 94 HB |
| Halogen Free | Yes |

Operating Temperature -40°F to +230°F (-40°C to +110°C)

ROHS Compliant Yes

Package Quantity (Imperial) 1000

Package Quantity (Metric) 1000