


Specification Sheet

Part Number: 157-00172

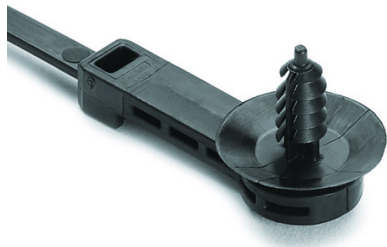

1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHS, Black, 500/pkg

Article Number

157-00172

Type

T50ROSFTM6SO25B

Color

Black (BK)

Features & Benefits

- One-piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables, through the design of the fir tree by ensuring positive and secure fixing into panels with thicknesses from 0.6-6.65mm.
- The offset on the cable tie creates an alternate solution when an offset fixing option is required and a tape clip cannot be used due to the design which reduces the potential of the bundle flexing or shifting.
- The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Quantity Per

carton

Product Description

HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Short Description

1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHS, Black, 500/pkg

Global Part Name

T50ROSFTM6SO25B-PA66HIRHS-BK

Minimum Tensile Strength (Imperial)

50.0

Minimum Tensile Strength (Metric)

220.0

Length L (Imperial)

9.1

Length L (Metric)

230.0

Offset Length(Imperial)

0.98

Offset Length(Metric)

25.0

Fixation Method

Fir Tree

Identification Plate Position

none

Releasable Closure

No

Width W (Imperial)

0.75

Width W (Metric)

4.6

Bundle Diameter Min (Imperial)

0.06

| | |
|--|--|
| Bundle Diameter Min (Metric) | 1.5 |
| Bundle Diameter Max (Imperial) | 1.97 |
| Bundle Diameter Max (Metric) | 50.0 |
| Height H (Imperial) | 0.86 |
| Panel Thickness Min(Imperial) | 0.02 |
| Panel Thickness Max(Imperial) | 0.22 |
| Panel Thickness Min (Metric) | 0.60 |
| Panel Thickness Max (Metric) | 5.50 |
| Mounting Hole Diameter D (Imperial) | 0.24 |
| Mounting Hole Diameter D Min (Imperial) | 0.24 |
| Mounting Hole Diameter D Max (Imperial) | 0.24 |
| Mounting Hole Diameter D Max (Metric) | 6.0 |
| Disc Diameter (Imperial) | 0.75 |
| Material | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut | PA66HIRHS |
| Operating Temperature (Metric) | -40°F to +230°F (-40°C to +110°C) |

Reach Complaint(Article 33)

Yes

ROHS Complaint

Yes

Package Quantity(Imperial)

500

Package Quantity (Metric)

500

Customs Number

3926909988

Content Unit(BMEcat)

pcs.