


## Specification Sheet

Part Number: 157-00241

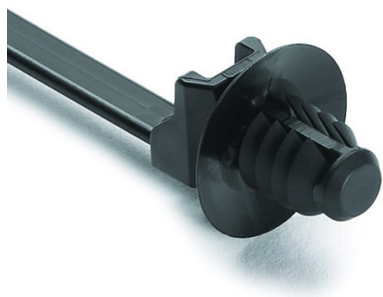

1-Piece Cable Tie/Fir Tree Mount with Disc, 6.3"L, 6.1 - 6.9 mm Mnt Hole, PA66HIRHS, Black, 5000/pkg

Article Number	157-00241
Type	T50SOSFT6E3
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none"><li>• Fir Tree Push Mount offers simple and easy to use method of bundling and fixing cable ties.</li><li>• The design of the fir tree ensures a positive secure fixing into panels with thicknesses from 0.7mm to 3.5mm or threaded blind holes.</li><li>• The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.</li></ul>
Quantity Per	box
Product Description	One-piece mounting ties offer a complete solution by both bundling cable and at the same time providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.

<b>Short Description</b>	1-Piece Cable Tie/Fir Tree Mount with Disc, 6.3"L, 6.1 - 6.9 mm Mnt Hole, PA66HIRHS, Black, 5000/pkg
<b>Global Part Name</b>	T50SOSFT6E3-PA66HIRHS-BK
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	150.0
<b>Length L (Imperial)</b>	6.34
<b>Length L (Metric)</b>	161.0
<b>Fixation Method</b>	Fir Tree
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Width W (Imperial)</b>	0.19
<b>Width W (Metric)</b>	4.7
<b>Bundle Diameter Min (Imperial)</b>	0.04
<b>Bundle Diameter Min (Metric)</b>	1.0
<b>Bundle Diameter Max (Imperial)</b>	1.38
<b>Bundle Diameter Max (Metric)</b>	35.0

<b>Panel Thickness Min(Imperial)</b>	0.03
<b>Panel Thickness Max(Imperial)</b>	0.14
<b>Panel Thickness Min (Metric)</b>	0.7
<b>Panel Thickness Max (Metric)</b>	3.5
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 " - 0.27
<b>Mounting Hole Diameter D (Metric)</b>	6.1 - 6.9 mm
<b>Mounting Hole Diameter D Max (Metric)</b>	6.9
<b>Disc Diameter(Metric)</b>	16.0
<b>Disc Diameter (Imperial)</b>	0.63
<b>Material</b>	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
<b>Material Shortcut</b>	PA66HIRHS
<b>Operating Temperature (Metric)</b>	-40°F to +230°F (-40°C to +110°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Package Quantity(Imperial)</b>	5000

**Package Quantity (Metric)**

5000

**Customs Number**

3926909988

**Content Unit(BMEcat)**

pcs.