


Specification Sheet

Part Number: 157-00308

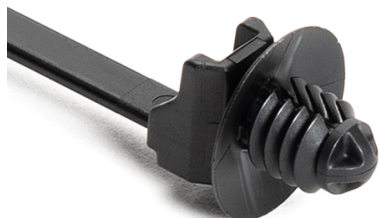

1-Piece Cable Tie/Fir Tree Mount with Disc, 0.24" - 0.27" Mounting Hole, PA66HS, Black, 4000/pkg

Article Number	157-00308
Type	T50SOSFT6.5-E4
Color	Black (BK)
Quantity Per	bag
Product Description	One-piece mounting ties offer a complete solution by both bundling cable and at the same time providing a mounting solution. HellermannTyton's one-piece mounting ties offer the ideal combination of high specification materials and superior design to suit the mounting and bundling needs of complex applications.
Short Description	1-Piece Cable Tie/Fir Tree Mount with Disc, 0.24" - 0.27" Mounting Hole, PA66HS, Black, 4000/pkg
Global Part Name	T50SOSFT6.5-E4-PA66HS-BK

Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	6.3
Length L (Metric)	161.5
Fixation Method	Fir Tree
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.04
Bundle Diameter Min (Metric)	1.0
Bundle Diameter Max (Imperial)	1.38
Bundle Diameter Max (Metric)	35.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.3
Panel Thickness Min(Imperial)	0.02

Panel Thickness Max(Imperial)	0.17
--------------------------------------	------

Panel Thickness Min (Metric)	0.6
-------------------------------------	-----

Panel Thickness Max (Metric)	4.2
-------------------------------------	-----

Mounting Hole Diameter D (Imperial)	0.24 - 0.27
--	-------------

Mounting Hole Diameter D (Metric)	6.0 - 7.0 mm
--	--------------

Mounting Hole Diameter D Min (Imperial)	0.24
--	------

Mounting Hole Diameter D Max (Imperial)	0.27
--	------

Mounting Hole Diameter D Max (Metric)	7.0
--	-----

Disc Diameter(Metric)	16.0
------------------------------	------

Disc Diameter (Imperial)	0.63
---------------------------------	------

Material	Polyamide 6.6 heat stabilized (PA66HS)
-----------------	--

Material Shortcut	PA66HS
--------------------------	--------

Flammability	UL 94 HB
---------------------	----------

Operating Temperature (Metric)	-40°F to +221°F (-40°C to +105°C)
---------------------------------------	-----------------------------------

ROHS Complaint	Yes
-----------------------	-----

Package Quantity(Imperial)

4000

Package Quantity (Metric)

4000

Weight (Metric)

0.00144

Weight (Imperial)

0.00317