


## Specification Sheet

Part Number: 157-00327

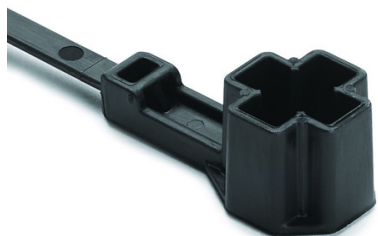

Offset M8 Stud Mount Tie, 7.5" Tie, 50lb Tensile Strength, PA66HIRHS, Black, 3000/pkg

Article Number	157-00327
Type	T50ROSM8SMS025
Color	Black (BK)
Features & Benefits	<ul style="list-style-type: none"><li>• Offset design positions bundles away from obstructions, heat or sources of abrasion.</li><li>• Four-pawl, three-tooth design delivers outstanding stud retention to keep bundles secure.</li><li>• PA46 material option allows use in high-heat applications.</li></ul>
Quantity Per	carton

### Product Description

This mount features an offset design, which positions bundles away from obstructions, heat or sources of abrasion. With their low insertion force and high extraction performance, HellermannTyton mounting ties offer the ideal combination of high-grade materials and superior design to suit the mounting and bundling needs of complex applications. Available in standard and high-heat material options.

<b>Short Description</b>	Offset M8 Stud Mount Tie, 7.5" Tie, 50lb Tensile Strength, PA66HIRHS, Black, 3000/pkg
<b>Global Part Name</b>	T50ROSM8SMS025-PA66HIRHSUV-BK
<b>Minimum Tensile Strength (Imperial)</b>	50.0
<b>Minimum Tensile Strength (Metric)</b>	223
<b>Length L (Imperial)</b>	8.9
<b>Length L (Metric)</b>	226.0
<b>Offset Length(Imperial)</b>	1.0
<b>Offset Length(Metric)</b>	25.5
<b>Fixation Method</b>	Stud Mount
<b>Identification Plate Position</b>	none
<b>Releasable Closure</b>	No
<b>Tie Closure</b>	plastic pawl
<b>Width W (Imperial)</b>	0.70
<b>Width W (Metric)</b>	17.75
<b>Bundle Diameter Min (Imperial)</b>	0.08
<b>Bundle Diameter Min (Metric)</b>	2.0

<b>Bundle Diameter Max (Imperial)</b>	1.97
<b>Bundle Diameter Max (Metric)</b>	50.0
<b>Cable Ties</b>	157-00327
<b>Height H (Imperial)</b>	0.59
<b>Height H (Metric)</b>	15.0
<b>Mounting Hole Diameter D (Imperial)</b>	0.31" x 0.05
<b>Mounting Hole Diameter D (Metric)</b>	M8 x 1.25
<b>Stud Diameter (Metric)</b>	8.0 mm
<b>Stud Diameter (Imperial)</b>	0.31
<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature (Metric)</b>	-40°F to +230°F (-40°C to +110°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes

<b>Package Quantity(Imperial)</b>	3000
<b>Package Quantity (Metric)</b>	1500
<b>Content Unit(BMEcat)</b>	pcs.
<b>Weight (Metric)</b>	0.0038
<b>Weight (Imperial)</b>	0.008