


Specification Sheet

Part Number: 157-00366

Off-Set design allows bundles to sit off of mounting points to avoid friction against surrounding areas.

Fir tree gives 3 to 1 extraction versus insertion force making them strong and easy to install.

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

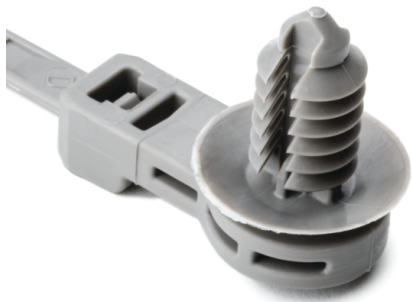

1-Piece Cable Tie/Fir Tree Mount w/Disc, 12.5mm Offset, 8.5"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn

Article Number 157-00366

Type T50ROSFT6SO12.5A

Color Gray (GY)

Quantity Per bag

Product Description HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Short Description 1-Piece Cable Tie/Fir Tree Mount w/Disc, 12.5mm Offset, 8.5"L, 6.1 - 7.0 mm or 6.35 mm (hexagonal) Hole, PA66HIRHS, Gray, 3000/ctn

Global Part Name T50ROSFT6SO12.5A-PA66HIRHS-GY

Minimum Tensile Strength (Imperial) 50

Minimum Tensile Strength (Metric) 225

Length L (Imperial) 8.5

Length L (Metric) 215.9

Offset Length (Imperial) 0.49

Offset Length (Metric) 12.5

Fixation Method Fir tree for round holes

Identification Plate Position none

Releasable Closure No

Width W (Imperial) 0.19

Width W (Metric) 5.1

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 50.0

Height H (Imperial)	0.87
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.26
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.65
Mounting Hole Diameter D (Imperial)	0.24 - 0.28 " 0.25 (hexagonal)
Mounting Hole Diameter D (Metric)	6.1 - 7.0 mm 6.35 mm (hexagonal)
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.28
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter (Metric)	15.0
Disc Diameter (Imperial)	0.59
Material	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Material Shortcut	PA66HIRHS
UV Resistant (Yes/No)	No

Operating Temperature -40°F to +230°F (-40°C to +110°C)

Reach Compliant (Article 33) No

ROHS Compliant Yes

Package Quantity (Imperial) 3000

Package Quantity (Metric) 3000

Customs Number 3926909988

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 40 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)