


## Specification Sheet

Part Number: 157-00430

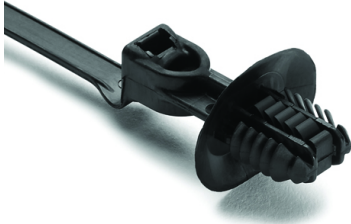

All-in-one bundling and fastening solution reduces costs and assembly time.

Anti-rotational oval fastener forces bundle to travel in intended direction.

Stand-off cable ties route and position bundles above a mounting hole to protect them from rubbing, heat or obstructions.

1-Pc Cable Tie/Stand-off Fir Tree w/Disc, 12.5mm Stand-Off, 9.1"L, 0.24-0.51", PA66HIRHSUV, Black,100/pkg

**Article Number** 157-00430

**Type** T50ROSFTOVAL12.5SO

**Color** Black (BK)

**Quantity Per** bag

**Product Description** One-piece stand-off cable tie and mount offers a simple bundling and mounting solution. The innovative design of this fir tree establishes a 360-degree interface with the panel hole, ensuring a more secure fit. The oval shape won't rotate once inserted, ensuring proper routing of wires and hoses. Stand-off feature positions bundles above a mounting hole. The disc prevents rattling in high-vibration applications and protects against debris ingress.

**Short Description** 1-Pc Cable Tie/Stand-off Fir Tree w/Disc, 12.5mm Stand-Off, 9.1"L, 0.24-0.51", PA66HIRHSUV, Black,100/pkg

**Global Part Name** T50ROSFTOVAL12.5SO-PA66HIRHSUV-BK

**Minimum Tensile Strength (Imperial)** 50.0

**Minimum Tensile Strength (Metric)** 225.0

**Length L (Imperial)** 9.1

**Length L (Metric)** 231.3

**Offset Length (Imperial)** 0.49

**Offset Length (Metric)** 12.5

**Identification Plate Position** none

**Releasable Closure** No

**Width W (Imperial)** 0.2

**Width W (Metric)** 5.1

**Bundle Diameter Min (Imperial)** 0.08

**Bundle Diameter Min (Metric)** 2.0

**Bundle Diameter Max (Imperial)** 1.97

**Bundle Diameter Max (Metric)** 50.0

**Height H (Imperial)** 0.06

<b>Height H (Metric)</b>	1.5
<b>Panel Thickness Min (Imperial)</b>	0.02
<b>Panel Thickness Max (Imperial)</b>	0.27
<b>Panel Thickness Min (Metric)</b>	0.6
<b>Panel Thickness Max (Metric)</b>	6.75
<b>Mounting Hole Diameter D (Imperial)</b>	0.24 " x 0.48 ";0.26 " x 0.49 ";0.26 " x 0.51 ";0.28 " x 0.47
<b>Mounting Hole Diameter D (Metric)</b>	6.5 x 12.5 mm 7.0 x 12.0 mm 6.5 x 13.0 mm 6.2 x 12.2 mm
<b>Disc Diameter (Metric)</b>	17.63 x 23.63
<b>Disc Diameter (Imperial)</b>	0.69 " x 0.93
<b>Material</b>	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
<b>Material Shortcut</b>	PA66HIRHSUV
<b>Flammability</b>	UL 94 HB
<b>Operating Temperature</b>	-40°F to +221°F (-40°C to +105°C)
<b>ROHS Compliant</b>	Yes

**Package Quantity (Imperial)** 100

**Package Quantity (Metric)** 100

**Customs Number** 3926909988