


Specification Sheet

Part Number: 157-00502

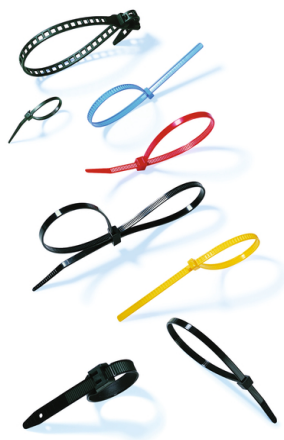

All-in-one bundling and fastening solution reduces costs and assembly time.

Anti-rotational oval fastener forces bundle to travel in intended direction.

Offset cable ties route and position bundles away from a mounting hole to protect them from rubbing, heat or obstructions.

1-Pc Cable Tie/Oval Fir Tree with Disc, 15mm Offset, 0.24-0.51" Hole, PA66HIRHSUV, Black, 3000/ctn

Article Number

157-00502

Type

T50ROSFTOVALIL15B

Color

Black (BK)

Quantity Per

carton

Product Description

One-piece offset cable tie and mount offers a simple bundling and mounting solution. The innovative design of this fir tree establishes a 360-degree interface with the panel hole, ensuring a more secure fit. The oval shape won't rotate once inserted, ensuring proper routing of wires and hoses. Offset feature positions bundles away from a mounting hole. The disc feature prevents rattling in high-vibration applications and protects against debris ingress.

Short Description

1-Pc Cable Tie/Oval Fir Tree with Disc, 15mm Offset, 0.24-0.51" Hole, PA66HIRHSUV, Black, 3000/ctn

Global Part Name T50ROSFTOVALIL15B-PA66HIRHSUV-BK

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225.0

Length L (Imperial) 8.75

Length L (Metric) 222.3

Offset Length (Imperial) 0.59

Offset Length (Metric) 15.0

Fixation Method Fir Tree for oval holes

Identification Plate Position none

Releasable Closure No

Variant Outside Serrated

Width W (Imperial) 0.18

Width W (Metric) 4.7

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric)	50.0
Height H (Imperial)	0.69
Height H (Metric)	17.6
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.26
Panel Thickness Min (Metric)	0.60
Panel Thickness Max (Metric)	6.75
Mounting Hole Diameter D (Imperial)	0.24 x 0.48 "; 0.25 x 0.50 "; 0.25 x 0.51 "; 0.27 x 0.47
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.51
Mounting Hole Diameter D Max (Metric)	13.0
Disc Diameter (Metric)	17.6 x 23.6
Disc Diameter (Imperial)	0.69 x 0.93
Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
Material Shortcut	PA66HIRHSUV

Flammability	UL 94 HB
Halogen Free	Yes
UV Resistant (Yes/No)	Yes
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
ROHS Compliant	Yes
Package Quantity (Imperial)	3000
Package Quantity (Metric)	3000

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)