


## Specification Sheet

Part Number: 3N9C

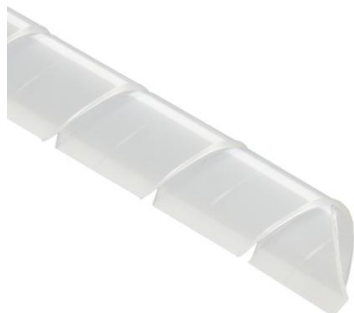

Spiralwrap Protective Sheathing, .5" Diameter, PA6, Natural, 100 ft/roll

<b>Article Number</b>	161-05051
<b>Type</b>	3N
<b>Color</b>	Natural (NA)
<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>• Sheathing allows flexible routing and lead-out of cables</li><li>• The inner edges are beveled preventing damage to cables</li><li>• Sheathing is reusable and resistant to most chemicals</li><li>• Spiralwrap is U.L. Recognized</li></ul>
<b>Quantity Per</b>	reel
<b>Product Description</b>	HellermannTyton's Spiralwrap protective sheathing provides cable protection and flexible routing. Spiralwrap is wrapped around a group of cables to shield and organize.
<b>Short Description</b>	Spiralwrap Protective Sheathing, .5" Diameter, PA6, Natural, 100 ft/roll
<b>Global Part Name</b>	3N-PA6-NA

<b>Length L (Imperial)</b>	100.0
<b>Length L (Metric)</b>	30.48
<b>Variant</b>	Spiral Binding
<b>Bundle Diameter Min (Imperial)</b>	0.375
<b>Bundle Diameter Min (Metric)</b>	9.52
<b>Bundle Diameter Max (Imperial)</b>	4.0
<b>Bundle Diameter Max (Metric)</b>	102.0
<b>Diameter D (imperial)</b>	0.5
<b>Diameter D (metric)</b>	12.7
<b>Nominal Diameter (Imperial)</b>	1/2
<b>Nominal Diameter (Metric)</b>	12.7
<b>Wall Thickness WT (Imperial)</b>	0.035
<b>Wall Thickness WT (Metric)</b>	0.89
<b>Material</b>	Polyamide 6 (PA6)
<b>Material Shortcut</b>	PA6

<b>Flammability</b>	Self-Extinguishing
<b>Halogen free</b>	Yes
<b>Operating Temperature (Metric)</b>	-40°F to +250°F (-40°C to +121°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>UL Recognized (US)</b>	Yes
<b>Package Quantity(Imperial)</b>	100
<b>Package Quantity (Metric)</b>	30.48
<b>Customs Number</b>	3926909988