

Specification Sheet


Part Number: 166-90030

External nickel-plated brass metric thread provides a secure connection. Snap-on construction reduces installation time and costs by eliminating the need to thread fittings onto conduits.

All-around "teeth" attach firmly to conduit and deliver a high extraction force.

Durable nylon material has high resistance to salts, oils, weak acids and solvents.

IP68 fitting has additional conduit seal for increased protection against wind, dirt and water.

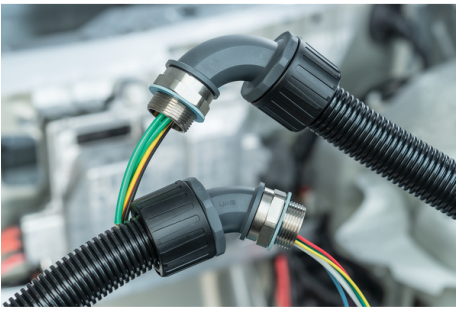

HelaGuard Non-Met IP68 Fitting, Straight Brass Swivel, Ext. Metric Thread, 0.75" (25mm) Dia, NPB/PA66, Black, 10/pkg

Article Number 166-90030

Type HGL075-SM-M25

Color Black (BK)

Product Description HelaGuard Non-Metallic Straight Brass Swivel fitting features a snap-on design and a nickel-plated brass metric thread that provides a quick, secure connection. Constructed of a very durable nylon material with a high resistance to salts, oils, weak acids and solvents. Designed for easy removal with a small screwdriver. IP68 ingress protection rated fittings.

Short Description	HelaGuard Non-Met IP68 Fitting, Straight Brass Swivel, Ext. Metric Thread, 0.75" (25mm) Dia, NPB/PA66, Black, 10/pkg
Global Part Name	HGL075-SM-M25-PA66/NPB-BK
Length L (Imperial)	1.13
Length L (Metric)	28.5
Variant	Straight
Outside Diameter OD (Imperial)	1.73
Outside Diameter OD (Metric)	44
Nominal Diameter (Imperial)	0.75
Nominal Diameter (Metric)	28
Material	Nickel Plated Brass (NPB) Polyamide 6.6 (PA66)
Material Shortcut	NPB PA66
Flammability	UL 94 V-2
Halogen Free	Yes
Operating Temperature	-58°F to +275°F (-50°C to +135°C)

Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
UL Listed (US and Canada)	Yes
UL Listed (US)	Yes
Package Quantity (Imperial)	10
Package Quantity (Metric)	10
Customs Number	3917400000

© 2022 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)