

Specification Sheet


Part Number: 170-03088

Split wrap design needs no fasteners and installs quickly, saving assembly time and future accessibility without disassembly.

Bends to a tight radius without distortion or splitting open.

Unique construction retains shape and rigidity throughout unrolling.

Easy open design allows quick access and ability to apply protective sleeving post assembly or post installation situations.

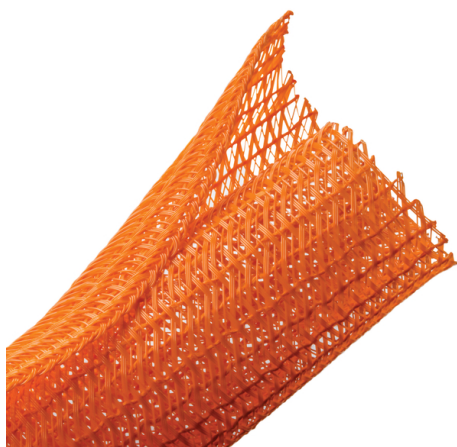

Braided Sleeving, Split Wrap, 2" Dia, PET, Orange, 50 ft/bulk reel

Article Number

170-03088

Type

BSPSW203B

Color

Orange (OG), High Voltage (HV)

Quantity Per

reel

Product Description

A lateral split semi-rigid braided sleeving configuration used when ease of installation and repeat access to wire bundle is required. The lateral split allows the sleeving to open and accommodate a variety of bundling requirements. The 25% edge overlap rolls back over connectors and splices without exposing the bundled wires.

Short Description

Braided Sleeving, Split Wrap, 2" Dia, PET, Orange, 50 ft/bulk reel

Global Part Name BSPSW203B-PET-OG

Length L (Imperial) 50.0

Length L (Metric) 15.2

Bundle Diameter Min (Imperial) 0.1

Bundle Diameter Min (Metric) 2.54

Bundle Diameter Max (Imperial) 2.0

Bundle Diameter Max (Metric) 50.8

Diameter D (Imperial) 2.0

Diameter D (Metric) 50.8

Nominal Diameter (Imperial) 2

Nominal Diameter (Metric) 50.8

Wall Thickness WT (Imperial) 0.038

Wall Thickness WT (Metric) 0.97

Material Polyester (PET)

Material Shortcut PET

| | |
|------------------------------|-----------------------------------|
| Flammability | UL 94 V-0 |
| Halogen Free | Yes |
| UV Resistant (Yes/No) | Yes |
| Operating Temperature | -94°F to +257°F (-70°C to +125°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| UL Recognized (US) | Yes |
| Package Quantity (Imperial) | 50 |
| Package Quantity (Metric) | 15.24 |
| Customs Number | 5808100000 |

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 40 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)