


## Specification Sheet

Part Number: 170-03097

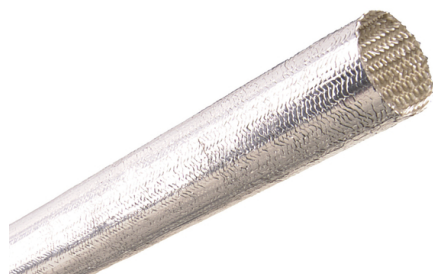

A layer of aluminum provides protection from chemicals, scraping, cuts and abrasion.

Additional layer also provides insulation barrier for vulnerable wires and cables within high temperature environments.

Cuts with ordinary scissors for fast, easy application.

Braided Sleeving, Aluminum Laminated Fiberglass, 2.5" Dia, AL/GF, Silver, 50 ft/reel

**Article Number** 170-03097

**Type** BSHTTST212SR

**Color** Silver (SR)

**Quantity Per** reel

**Product Description** High Temperature Aluminum Laminated Fiberglass Sleeving is a tubular shaped product that combines the protection of bonded aluminum and fiberglass into a single solution that is able to reflect radiant heat away from the sensitive contents inside the tube.

**Short Description** Braided Sleeving, Aluminum Laminated Fiberglass, 2.5" Dia, AL/GF, Silver, 50 ft/reel

**Global Part Name** BSHTTST212SR-AL/GF-SR

<b>Length L (Imperial)</b>	50.0
<b>Length L (Metric)</b>	15.2
<b>Bundle Diameter Min (Imperial)</b>	0.1
<b>Bundle Diameter Min (Metric)</b>	2.54
<b>Bundle Diameter Max (Imperial)</b>	2.375
<b>Bundle Diameter Max (Metric)</b>	60.3
<b>Diameter D (Imperial)</b>	2.5
<b>Diameter D (Metric)</b>	63.5
<b>Nominal Diameter (Imperial)</b>	2.5
<b>Nominal Diameter (Metric)</b>	63.5
<b>Wall Thickness WT (Imperial)</b>	0.025
<b>Wall Thickness WT (Metric)</b>	0.64
<b>Material</b>	Glass Fiber (GF) Aluminum (AL)
<b>Material Shortcut</b>	GF AL

<b>Flammability</b>	Non-flammable
<b>Halogen Free</b>	Yes
<b>Operating Temperature</b>	-76°F to +491°F (-60°C to +255°C)
<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Package Quantity (Imperial)</b>	50
<b>Package Quantity (Metric)</b>	15.24
<b>Customs Number</b>	7019905050