


## Specification Sheet

Part Number: 170-20600

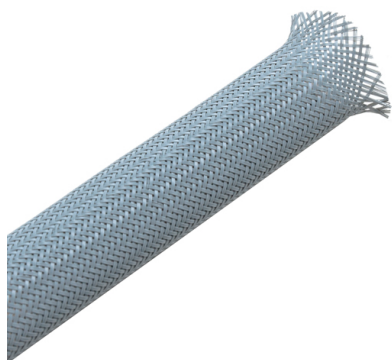

Nylon monofilament construction weave offers a tight braid that provides full coverage but will not rot or retain moisture. Material performs well in wet applications and where abiding substrate has a smooth surface.

Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel

**Article Number** 170-20600

**Type** HEGPA6606

**Color** Gray (GY)

**Quantity Per** metre

**Product Description** Helagaine Nylon Polyamide Expandable Braided Sleeving is a pliable yet durable sleeve that protects against cuts, abrasion and excessive wear caused by repetitive motion.

**Short Description** Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel

**Global Part Name** HEGPA6606-PA66-GY

<b>Length L (Imperial)</b>	328.0
<b>Length L (Metric)</b>	100.0
<b>Bundle Diameter Min (Imperial)</b>	0.16
<b>Bundle Diameter Min (Metric)</b>	4
<b>Bundle Diameter Max (Imperial)</b>	0.32
<b>Bundle Diameter Max (Metric)</b>	8
<b>Diameter D (Imperial)</b>	0.24
<b>Diameter D (Metric)</b>	6.1
<b>Nominal Diameter (Imperial)</b>	0.25
<b>Nominal Diameter (Metric)</b>	6
<b>Material</b>	Polyamide 6.6 (PA66)
<b>Material Shortcut</b>	PA66
<b>Flammability</b>	UL 94 V2 FMVSS 302
<b>Halogen Free</b>	Yes
<b>Operating Temperature</b>	-76°F to +302°F (-60°C to +150°C)

<b>Reach Compliant (Article 33)</b>	Yes
<b>ROHS Compliant</b>	Yes
<b>Certification/Specification</b>	RST LAB   DIN EN [45545-2] (02/2016) EDAG-LAB   ECE R-118-03 Abschnitt 6 / Annex 6 (PB-58022-0019-02) RST-LAB   ECE R-118-03 Abschnitt 8 / Annex 8 (PB60-18-0688, PB60-18-0689)
<b>Package Quantity (Imperial)</b>	328
<b>Package Quantity (Metric)</b>	100
<b>Customs Number</b>	5808100000

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)