


Specification Sheet

Part Number: 170-20800

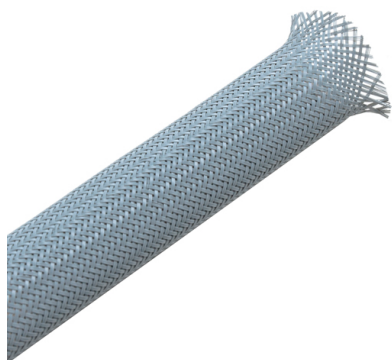

Nylon monofilament construction weave offers a tight braid that provides full coverage but will not rot or retain moisture. Material performs well in wet applications and where abiding substrate has a smooth surface.

Helagaine Braided Sleeving, 8 mm Dia, PA66, GY, 328ft/Reel

Article Number	170-20800
Type	HEGPA6608
Color	Gray (GY)
Quantity Per	metre
Product Description	Helagaine Nylon Polyamide Expandable Braided Sleeving is a pliable yet durable sleeve that protects against cuts, abrasion and excessive wear caused by repetitive motion.
Short Description	Helagaine Braided Sleeving, 8 mm Dia, PA66, GY, 328ft/Reel
Global Part Name	HEGPA6608-PA66-GY

Length L (Imperial)	328.0
Length L (Metric)	100.0
Bundle Diameter Min (Imperial)	0.2
Bundle Diameter Min (Metric)	5
Bundle Diameter Max (Imperial)	0.4
Bundle Diameter Max (Metric)	10
Diameter D (Imperial)	0.31
Diameter D (Metric)	7.9
Nominal Diameter (Imperial)	0.31
Nominal Diameter (Metric)	8
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	FMVSS 302 UL 94 V2
Halogen Free	Yes
Operating Temperature	-76°F to +302°F (-60°C to +150°C)

Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	EDAG-LAB ECE R-118-03 Abschnitt 6 / Annex 6 (PB-58022-0019-02) RST-LAB ECE R-118-03 Abschnitt 8 / Annex 8 (PB60-18-0688, PB60-18-0689) RST LAB DIN EN [45545-2] (02/2016)
Package Quantity (Imperial)	328
Package Quantity (Metric)	100
Customs Number	5808100000

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)