


Specification Sheet

Part Number: 181-00640

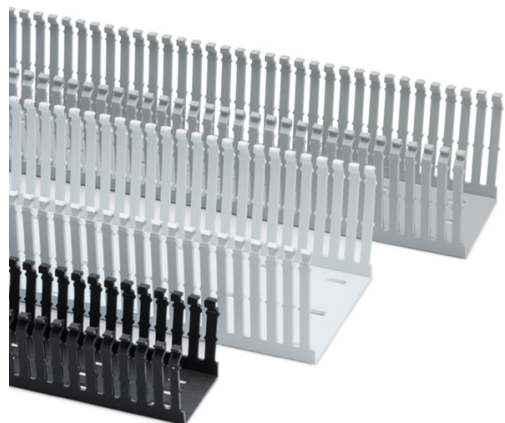

High Density Slotted Wall Wiring Duct, 2" x 1", Adhesive, PVC, Black, 120ft/Carton

Article Number

181-00640

Type

SLHDA2X1

Color

Black (BK)

Features & Benefits

- Narrow fingers reduce fanning of wires to terminal blocks, providing a neater appearance.
- Each finger features a double restriction to hold wires in the bottom portion of the duct, simplifying installation.
- Mounting holes are uniform in size to those in slotted and solid wall duct but are provided every two inches to accommodate compact designs and provide ease of installation.
- Nonpermanent adhesive allows repositioning prior to final installation.

Quantity Per

carton

Product Description

HellermannTyton High Density Slotted Wall Duct features narrow breakaway fingers, designed at a 2-to-1 ratio compared to standard slotted duct, providing additional access for wire leads. Narrower fingers better accommodate compact designs and components. Pressure-sensitive, rubber-based adhesive backing aids in temporary positioning.

Short Description

High Density Slotted Wall Wiring Duct, 2" x 1", Adhesive, PVC, Black, 120ft/Carton

Global Part Name

SLHDA2X1-PVC-BK

Technical Description

Adhesive

Length L (Imperial)

6.0

Length L (Metric)

1.83

Width W (Imperial)

2.0

Width W (Metric)

50.8

Height H (Imperial)

1.06

Height H (Metric)

26.9

Mounting Hole Centers (Imperial)

2.0

Material

Polyvinylchloride (PVC)

Material Shortcut

PVC

Flammability

Self-Extinguishing

Halogen free

No

Operating Temperature (Metric)

+122°F (+50°C)

Reach Complaint(Article 33)

No

ROHS Complaint

Yes

Certification/Specification WEB

EN 50085-1:2005 + A1:2013 CSA EN 50085-2-3_1A UL

UL Recognized (US)

Yes

Package Quantity(Imperial)

120

Package Quantity (Metric)

36.58

Customs Number

3925900000