


Specification Sheet

Part Number: 181-23040

Solid wall construction provides excellent coverage to keep wires clean. Durable material protects wires from damage, with long-lasting performance.

Available standard colors complement or contrast in light and dark environments.

Optional covers snap on and off easily, and are provided with a non-slip lining that insures the covers remain in place during vibration.

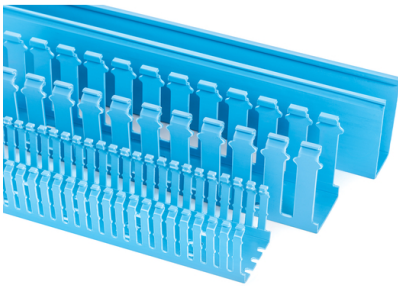

Solid-Wall Wiring Duct, 3" x 2", Non-Adhesive, PVC, Intrinsic Blue, 120 ft/carton

Article Number	181-23040
Type	SD3X2
Color	Intrinsic Blue (IBU)
Quantity Per	carton
Product Description	HellermannTyton Solid Wall Wiring Duct efficiently routes and protects wire. Solid wall wiring duct is designed for straight wire runs where breakouts are not required. Solid wall wiring duct is manufactured from high-impact, rigid PVC; comes in standard colors of white, gray and black; and is available in 6-foot lengths.
Short Description	Solid-Wall Wiring Duct, 3" x 2", Non-Adhesive, PVC, Intrinsic Blue, 120 ft/carton

Global Part Name SD3X2-PVC-BU

Length L (Imperial) 6.0

Length L (Metric) 1.83

Width W (Imperial) 3.0

Width W (Metric) 76.2

Height H (Imperial) 2.07

Height H (Metric) 52.60

Mounting Hole Centers (Imperial) 4.0

Material Polyvinylchloride (PVC)

Material Shortcut PVC

Flammability Self-extinguishing

Halogen Free No

Operating Temperature +122°F (+50°C)

Reach Compliant (Article 33) No

ROHS Compliant	Yes
Certification/Specification	CSA EN 50085-1:2005 + A1:2013 UL EN 50085-2-3_1A
UL Recognized (US)	Yes
Package Quantity (Imperial)	120
Package Quantity (Metric)	36.58

© 2022 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)