

Specification Sheet


Part Number: 181-23040

Solid wall construction provides excellent coverage to keep wires clean.

Durable material protects wires from damage, with long-lasting performance.

Available standard colors complement or contrast in light and dark environments.

Optional covers snap on and off easily, and are provided with a non-slip lining that insures the covers remain in place during vibration.

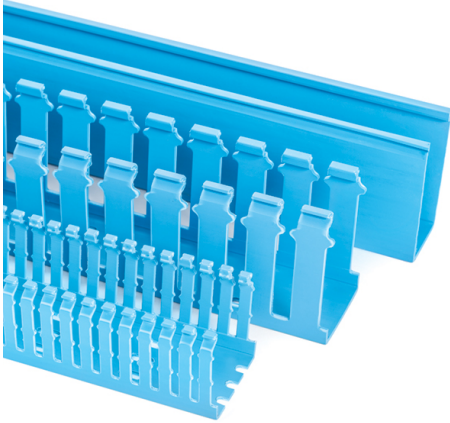

Solid-Wall Wiring Duct, 3" x 2", Non-Adhesive, PVC, Intrinsic Blue, 120 ft/carton

Article Number 181-23040

Type SD3X2

Color Intrinsic Blue (IBU)

Quantity Per carton

Product Description HellermannTyton's Pro-Duct, Solid Wall wiring duct efficiently routes and protects wire. Solid Wall wiring duct it designed for straight wire runs where break outs are not required. Pro-Duct, Solid Wall wiring duct is manufactured from high impact, rigid PVC, comes in standard colors of white, gray and black, and is available in 6-foot lengths.

Short Description	Solid-Wall Wiring Duct, 3" x 2", Non-Adhesive, PVC, Intrinsic Blue, 120 ft/carton
Global Part Name	SD3X2-PVC-BU
Length L (Imperial)	6.0
Length L (Metric)	1.83
Width W (Imperial)	3.0
Width W (Metric)	76.2
Height H (Imperial)	2.07
Height H (Metric)	52.60
Mounting Hole Centers (Imperial)	4.0
Material	Polyvinylchloride (PVC)
Material Shortcut	PVC
Flammability	Self-Extinguishing
Halogen Free	No
Operating Temperature	+122°F (+50°C)

Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	UL EN 50085-2-3_1A CSA EN 50085-1:2005 + A1:2013
UL Recognized (US)	Yes
Package Quantity (Imperial)	120
Package Quantity (Metric)	36.58

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)