


## Specification Sheet

Part Number: 183-05037

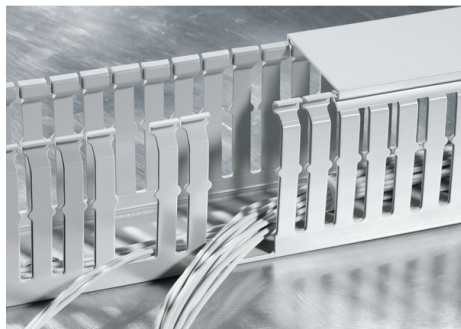

Excellent fire-safety characteristics.

Narrow slots suitable for small-diameter wires.

Fingers can be removed with no sharp edges at pre-notched snap-off points.

Duct covers hold securely even in a vertical position and under vibration.

Halogen Free Slotted Wiring Duct, w/o Adhesive, 50mm x 37.5mm, PC/ABS, Gray RAL, 32 m/Box

**Article Number** 183-05037

**Type** HTWD-HF-50X37.5

**Color** Gray RAL 7035 (7035)

**Quantity Per** box

**Product Description** HellermannTyton HTWD-HF halogen-free ducts are used wherever there are high demands on personal or material safety, such as public transport, tunnels, escalators and data processing centers. Snap-on covers are included with corresponding duct sizes to ensure complete wire protection. Base perforation according to DIN EN 50085. Note: Halogen-free PC+ABS is not resistant to all oils and greases.

**Short Description** Halogen Free Slotted Wiring Duct, w/o Adhesive, 50mm x 37.5mm, PC/ABS, Gray RAL, 32 m/Box

<b>Global Part Name</b>	HTWD-HF-50X37.5-PC/ABS-GY
<b>Length L (Imperial)</b>	6.56
<b>Length L (Metric)</b>	2
<b>Fixation Method</b>	Screw Mounting
<b>Width W (Imperial)</b>	1.97
<b>Width W (Metric)</b>	50
<b>Height H (Imperial)</b>	1.48
<b>Height H (Metric)</b>	37.5
<b>Material</b>	Acrylonitrile Butadiene Styrene alloyed with Polycarbonate (PC/ABS)
<b>Material Shortcut</b>	PC/ABS
<b>Flammability</b>	UL 94 V-0
<b>Halogen Free</b>	Yes
<b>Operating Temperature</b>	-13°F to +194°F (-25°C to +90°C)
<b>Reach Compliant (Article 33)</b>	Yes

<b>ROHS Compliant</b>	Yes
<b>Certification/Specification</b>	ISO11925 RATP   NF F 16-101 DIN EN [45545-2]
<b>Package Quantity (Imperial)</b>	104.9
<b>Package Quantity (Metric)</b>	32
<b>Customs Number</b>	3925900000

© 2021 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)