


## Specification Sheet

Part Number: 553-50012

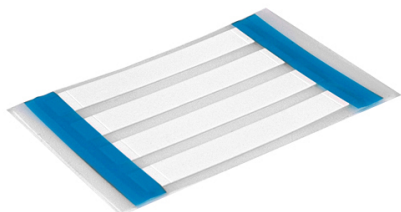

Heat Shrink Labels, Single Side, Unslit, .187" (4.74mm), PO-X, Yellow, 250/box

**Article Number**

553-50012

**Type**

HST4.8-1.6YE

**Color**

Yellow (YE)

**Features & Benefits**

- Slide Slit and optional center slits for easy wire insertion.
- Smooth surface for clean and legible printing.
- Supplied on a ladder style carrier so that markers can be kitted after printing.
- A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

**Quantity Per**

box

**Product Description**

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

<b>Short Description</b>	Heat Shrink Labels, Single Side, Unslit, .187" (4.74mm), PO-X, Yellow, 250/box
<b>Global Part Name</b>	HST4.8-1.6YE-PO-X-YE
<b>Variant</b>	Thin-Wall
<b>Width W (Imperial)</b>	1.9
<b>Width W (Metric)</b>	48.26
<b>Thickness T (Imperial)</b>	.003
<b>Thickness T (Metric)</b>	.0762
<b>Height H (Imperial)</b>	0.312
<b>Height H (Metric)</b>	7.92
<b>Width of Liner (Metric)</b>	76.2
<b>Width of Liner (imperial)</b>	3.0
<b>Outside Diameter OD(Imperial)</b>	0.187
<b>Outside Diameter OD(metric)</b>	4.74
<b>Outside Diameter Max(Imperial)</b>	0.187
<b>Outside Diameter Max (metric)</b>	4.74
<b>Wall Thickness WT (Imperial)</b>	0.026
<b>Wall Thickness WT (Metric)</b>	0.66

<b>Material</b>	Polyolefin, cross-linked (PO-X)
-----------------	---------------------------------

**Material Shortcut** PO-X

<b>US MIL SPEC</b>	SAE-AS81531
--------------------	-------------

SAE-AMS-DTL-23053/5 Class 1 and 3  
MIL-STD-202G Method 215K

**Flammability**

UL 224 VW-1

**Halogen free**

No

**Operating Temperature (Metric)**

-67°F to +275°F (-55°C to +135°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C  
600V VW-1

<b>Package Quantity(Imperial)</b>	250
-----------------------------------	-----

**Package Quantity (Metric)** 250

<b>Customs Number</b>	3926909987
-----------------------	------------

**Content Unit(BMEcat)** pack

<b>Labels per Column</b>	1
<b>Labels per Row</b>	1
<b>Weight (Metric)</b>	0.317
<b>Weight (Imperial)</b>	0.68