


## Specification Sheet

Part Number: 556-26009

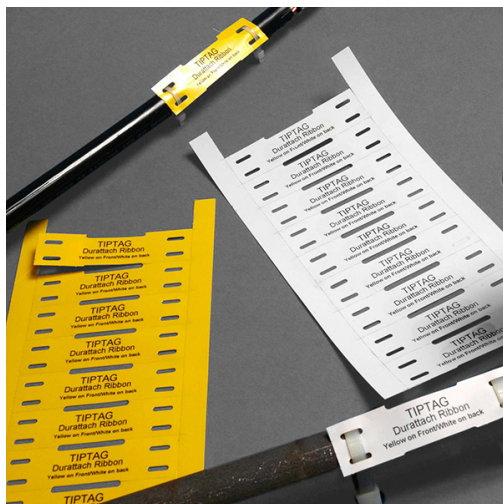

TipTag, 3.54" x .68" , PO/Polyester, White/Yellow, 500/roll

**Article Number**

556-26009

**Type**

TIPTAGVA15X90YEWB

**Color**

Yellow (YE) White (WH)

**Features & Benefits**

- Halogen Free for low smoke and low fire hazard applications.
- White front and yellow back for versatility.
- Superior strength and tear resistance for long lasting identification.
- Pre-cut slots to secure the TipTags using HellermannTyton cable ties.

**Quantity Per**

pack

**Product Description**

TIPTAGs are halogen free, tear resistant, and lightweight cross laminated polyolefin tags ideal for use where weight is a critical factor. Each side is a different color. One side is yellow and the other side is White so that a high contrast black on yellow or black on white mark can be printed.

<b>Short Description</b>	TipTag, 3.54" x .68", PO/Polyester, White/Yellow, 500/roll
<b>Global Part Name</b>	TIPTAGVA15X90YEWH-PO-WH/YE
<b>Fixation Method</b>	Others
<b>Variant</b>	Other
<b>Width W (Imperial)</b>	3.54
<b>Width W (Metric)</b>	90.0
<b>Height H (Imperial)</b>	0.68
<b>Height H (Metric)</b>	17.4
<b>Material</b>	Polyolefin (PO)
<b>Material Shortcut</b>	PO
<b>US MIL SPEC</b>	SAE-AS81531 MIL-STD-202G Method 215K
<b>Halogen free</b>	Yes
<b>Operating Temperature (Metric)</b>	-58°F to +221°F (-50°C to +105°C)
<b>Reach Complaint(Article 33)</b>	Yes

<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	MIL-STD-202G Method 215K BS-4G-198-3, Type 11a SAE - AS81531
<b>Package Quantity(Imperial)</b>	500
<b>Package Quantity (Metric)</b>	500
<b>Customs Number</b>	3921905050
<b>Content Unit(BMEcat)</b>	reel
<b>Weight (Metric)</b>	0.23
<b>Weight (Imperial)</b>	0.649