

## Specification Sheet


Part Number: TAG26J-994

HellermannTyton Inkjet labels are sheet fed for easy loading and fast printing.

Inkjet labels are made with high temperature materials and adhesives so that they will not be affected by the high heat of laser printing.

Inkjet labels are printable using toner for long term UV exposure.

Inkjet labels come in a variety of label sizes and types to fit most applications.

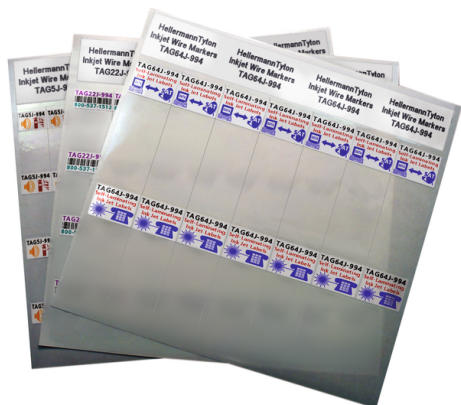

Inkjet Label, Self-Laminating, 0.50" x .35" x .75", 128 Per Sheet, PET, White, 2500/pkg

Article Number 593-26994

Type TAG26J

Color White (WH)

Quantity Per pack

**Product Description**  
HellermannTyton's inkjet self-laminating labels are smear resistant, allowing them to be handled immediately. The labels are made of a heat resistant 1mm polyester film with a strong acrylic based adhesive. The printable area is a special ink-receptive film that absorbs the ink as it is printed on an inkjet printer.

**Short Description**  
Inkjet Label, Self-Laminating, 0.50" x .35" x .75", 128 Per Sheet, PET, White, 2500/pkg

Global Part Name	TAG26J-994-WH
Width W (Imperial)	0.5
Width W (Metric)	12.7
Bundle Diameter Min (Imperial)	0.11
Bundle Diameter Min (Metric)	2.79
Bundle Diameter Max (Imperial)	.125
Bundle Diameter Max (Metric)	3.17
Thickness T (Metric)	35.0
Width of Liner (Metric)	215.9
Width of Liner (Imperial)	8.5
Outside Diameter Max (Imperial)	0.087
Outside Diameter Min (Metric)	1.5
Outside Diameter Min (Imperial)	0.059
Outside Diameter Max (Metric)	2.20
Material	Type 994, Polyethylene Terephthalate (994)

Material Shortcut	994
Adhesive	Acrylic
Halogen Free	No
UV Resistant (Yes/No)	No
Adhesive Operating Temperature	-40°F to +302°F (-40°C to +150°C)
Operating Temperature	-40°F to +302°F (-40°C to +150°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	2500
Package Quantity (Metric)	2500
Customs Number	3919905060
Labels per Column	8
Labels per Row	16

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global

customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin.  
([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)