


Specification Sheet

Part Number: 596-00888

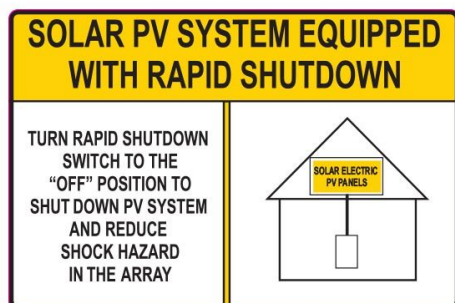

Solar Label, Reflective, SOLAR PV SYSTEM...SHUTDOWN, 6.0" x 4.0", V, Yellow, 10/pkg

Article Number

596-00888

Type

RSDYL1710

Color

Yellow (YE)

Features & Benefits

- Made with UV-stable inks and materials for durability and weather resistance.
- Reflective properties to meet applicable NEC code requirements for reflective identification.
- Supplied with an aggressive adhesive to ensure long life.
- Meets NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections.

Quantity Per

pack

Product Description	HellermannTyton makes it easier than ever for solar installers to meet PV labeling codes. Solar Label Convenience Packs allow installers to quickly and economically purchase high quality preprinted NEC 2014, 2017 and 2020 code-compliant solar installation labels. Packaged in 10-count quantities to meet the needs of smaller scale solar installations and independent contractors, Solar Label Convenience Packs are available in HellermannTyton's most popular preprinted NEC 2014, 2017 and 2020 code-compliant solar label formats. Each Solar Label Convenience Pack contains 10 solar installation labels. Choose from a variety of regular and reflective preprinted labels. For enhanced durability, clear laminate overlay labels are also available in a convenience pack.
Short Description	Solar Label, Reflective, SOLAR PV SYSTEM...SHUTDOWN, 6.0" x 4.0", V, Yellow, 10/pkg
Global Part Name	RSDYL1710-505/281-YE
Technical Description	Pre-Printed Solar Label, Reflective-2017 Code, Rapid Shutdown Label - Roof Safe, 6.0" X 4.0", Vinyl, Yellow, 10/pkg
Length L (Imperial)	4.0
Length L (Metric)	101.6
Width W (Imperial)	6.0
Width W (Metric)	152.4
Thickness T (Imperial)	0.0025
Thickness T (Metric)	64.0
Height H (Imperial)	4.0

Height H (Metric)	101.60
Material	Type 505/281, UV-stabilized reflective vinyl with clear polyester laminate (505/281)
Material Shortcut	505/281
Adhesive	Acrylic
Halogen free	No
Adhesive Operating Temperature	-40°F to +174°F (-40°C to +79°C)
Operating Temperature (Metric)	-40°F to +174°F (-40°C to +79°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Certification/Specification WEB	UL 969 NEC2017
Warranty (US)	Yes
UL Recognized (US)	Yes
Package Quantity(Imperial)	10
Package Quantity (Metric)	10

Customs Number 3919905060

Labels per Column 1

Labels per Row 1

Weight (Metric) 0.521

Weight (Imperial) 1.14