


## Specification Sheet

Part Number: 596-00920

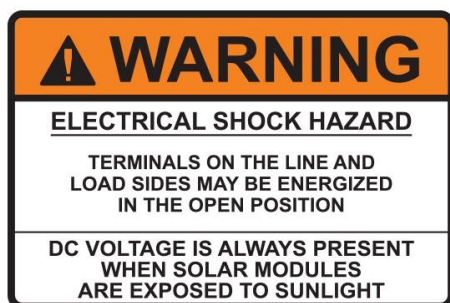

Metal Solar Placard, 2017 Code, WARNING ELECTRICAL...DC VOLTAGE, 3.75" x 2.5", AL,Orange/Silver,5/pkg

Article Number	596-00920
Type	WESHLBLDC17M5
Color	Orange (OG)
Features & Benefits	<ul style="list-style-type: none"><li>• Placards made with UV stable inks and materials tested to last up to 25 years, even in direct sun exposure.</li><li>• Aggressive adhesive ensures strong bond, even on powder coated surfaces.</li><li>• Meets or exceeds NEC &amp; IFC standards for printed text, character height, color and outdoor UV stability.</li><li>• Optional Paint Shields provide additional protection for pre-printed and variable data placards.</li></ul>
Quantity Per	pack

**Product Description**

Variable data placards are used to mark areas specific to the individual installation, like voltage data. Made of the same durable material as pre-printed metal solar placards, HellermannTyton offers two styles of variable placards: hand-writable and engravable. Both hand-writable placards feature a silver variable data area that can be marked using an industrial paint pen. Engravable placards have a black area that can be engraved using standard engraving equipment.

**Short Description**

Metal Solar Placard, 2017 Code, WARNING ELECTRICAL...DC VOLTAGE, 3.75" x 2.5", AL,Orange/Silver,5/pkg

**Global Part Name**

WESHLBLDC17M5-AA-OG

**Technical Description**

3.75" X 2.5" Black text on an Orange/Silver Aluminum background that reads as: "WARNING ELECTRICAL SHOCK HAZARD. TERMINALS ON BOTH LINE AND LOAD SIDE MAY BE ENERGIZED IN THE OPEN POSITION. DC VOLTAGE IS ALWAYS PRESENT WHEN SOLAR MODULES ARE EXPOSED TO SUNLIGHT" - 5 per pack

**Length L (Imperial)**

2.5

**Length L (Metric)**

63.5

**Width W (Imperial)**

3.75

**Width W (Metric)**

95.25

**Thickness T (Metric)**

64.0

**Height H (Imperial)**

2.50

**Height H (Metric)**

63.50

**Material**

Anodized Aluminum (AA)

**Material Shortcut**

AA

**Adhesive**

Ultra High Bond Permanent Acrylic Adhesive

**Halogen free**

No

**Adhesive Operating Temperature**

from +50°F (from +10°C)

**Operating Temperature (Metric)**

-40°F to +203°F (-40°C to +95°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

NEC2017

**Warranty (US)**

Yes

**Package Quantity(Imperial)**

5

**Package Quantity (Metric)**

5

**Customs Number**

3919102055

**Labels per Column**

1

**Labels per Row**

1

**Weight (Metric)**

.104

**Weight (Imperial)**

0.23

---

© 2019 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)