


Specification Sheet

Part Number: SEIR-3A-YL

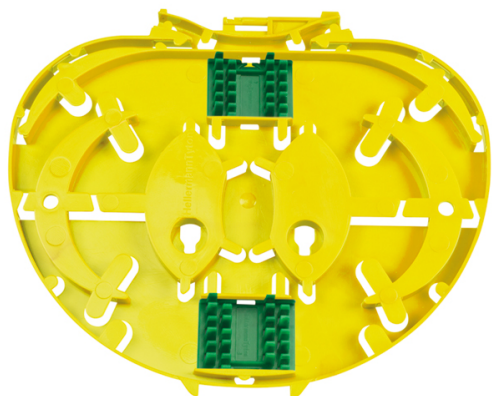

IR Single Circuit SE Tray with 2 x 3A Insert, Yellow, 6/pkg

Article Number

857-40505

Type

TRAY-SE-IR-YL-2X3A-06

Color

Yellow (YE)

Features & Benefits

- Positive fiber management maintains a minimum bend radius of 30 mm.
- Trays are supplied in a package of six, with multiple colors available for color coding of the installation.
- Optional splitter tray accommodates a single optical splitter up to a maximum of 60 x 7 x 4 mm and up to 6 heat shrink splices single stacked or 12 heat shrink splices double stacked.

Quantity Per

bag

Product Description

The Integrated Routing (IR) single element tray is manufactured from ABS and finished to a high specification to eliminate the risk of snagging or macrobends. All retaining tabs on the tray have radius edges and rounded corners where fiber may pass. Tray has a splice capacity of up to 24 fibers (double stacked) with heat shrink protectors up to 60 mm long. The IR single element tray is suitable for use in the UFC-IR or FDN-IR closures.

Short Description

IR Single Circuit SE Tray with 2 x 3A Insert, Yellow, 6/pkg

Global Part Name

TRAY-SE-IR-YL-2X3A-06

Technical Description

The Integrated Routing (IR) single element tray is manufactured from ABS and finished to a high specification to eliminate the risk of snagging or microbends. All retaining tabs on the tray have radius edges and rounded corners where fibre may pass. The overall dimensions of the tray are 148 x 125 x 7mm. The IR single element tray accepts a wide range of splice protector inserts and the maximum splice capacity of the tray is based on 24 double stacked heatshrink (3A) splice protectors up to 60mm long. The IR single element tray can accommodate 2 x 60 x 7 x 4mm optical splitters when using the optional splitter/3A or ANT splice bridge. A single optical splitter up to a maximum of 60 x 7 x 4mm can be fitted into the tray in place of a splice bridge. The IR single element tray is suitable for use in the UFC-IR, FDN-IR or FML-IR closures.

Contents of pkg/kit

6 x IR Single Element Trays, 12 x Heatshrink (3A) Splice Protector Holders

Width W (Imperial)

5.83

Width W (Metric)

148

Height H (Imperial)

4.92

Height H (Metric)

125

Depth D (imperial)

0.28

Depth D (metric)

7

Material

Acrylonitrile Butadiene Styrene (ABS)

Material Shortcut

ABS

Package Quantity(Imperial)

6

Package Quantity (Metric)

6

Customs Number

9030400000