


12 AWG - 65x30 Stranded Tinned Copper

Paired - Unshielded
Stranded Conductors
PVC Insulation - 300 Volt

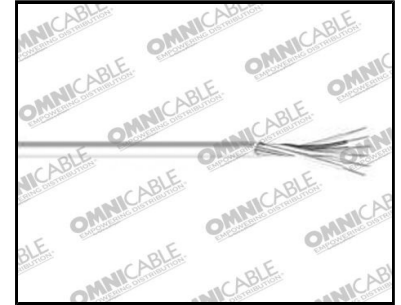

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Tinned Copper 300 Volt

Category Insulation Description:

- Polyvinyl Chloride (PVC)

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Applications:

- Allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Permits higher data speeds than multi-conductor cables

Standards:

- UL Listed: 90°C
- Voltage: 300 Volt

Color Code Chart	
# of Conductors	Color
1	Black
2	White

Part Number Table

Part#	Gauge	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
D91202	12	2	65x30 TC	0.032	0.035	0.386	85

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC