


14 AWG - 19x29 Stranded Tinned Copper

Multiconductor
Overall Aluminum Shield
Polyethylene Insulation
600 Volt AWM, 150 Volt CL2

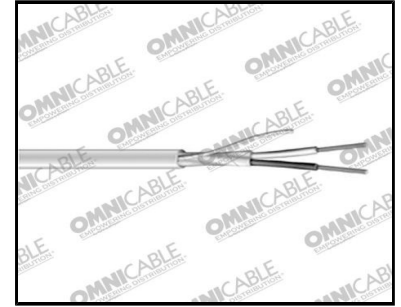

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Stranded tinned copper

Shield:

- 100% aluminum/polyester with stranded tinned copper drain wire

Applications:

- Paired cables allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than multi-conductor cables

Category Insulation Description:

- Polyethylene (PE), twisted pair

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Standards:

- CEC CM CL2
- CEC CM
- 600 Volt AWM
- 150 Volt CL2
- 80°C rated

Color Code Chart	
# of Pairs	Color
1	Black & Clear

Part Number Table

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
D11402	14	1	19 x 29	0.032	0.035	0.348	59

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC