


18 AWG – 19×30 Stranded Tinned Copper – Polyethylene

Paired - Stranded - 300 Volt
AWM 2919 - 30 Volts
Individually Aluminum Shielded
Polyethylene Insulation

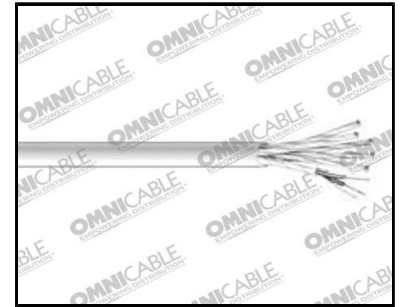

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Stranded tinned copper

Shield Drain:

- Each pair individually shielded with aluminum polyester shield and 20 AWG stranded tinned copper drain wire

Applications:

- Allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Recommended for audio, pulse, and radio frequency applications requiring superior circuit isolation
- Permits higher data speeds than multi-conductor cables

Category Insulation Description:

- Polyethylene (PE)

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Standards:

- CM: 300 Volts
- AWM 2919: 30 Volts

Color Code Chart	
# of Pairs	Color
1	Black & Red
2	Black & White
3	Black & Green
4	Black & Blue
5	Black & Yellow
6	Black & Brown
7	Black & Orange
8	Red & White
9	Red & Green

10	Red & Blue
11	Red & Yellow
12	Red & Brown
13	Red & Orange
14	Green & White
15	Green & Blue
16	Green & Yellow
17	Green & Brown
18	Green & Orange
19	White & Blue
20	White & Yellow

Part Number Table

Part#	Gauge	Pairs	Stranding	Outside Diameter Inches	Nominal Capacitance A	Nominal Capacitance B	Material Weight (Lbs./M')
D31802	18	2	19 x 30	0.334	30	55	56.1
D31803	18	3	19 x 30	0.384	30	55	65
D31806	18	6	19 x 30	0.56	30	55	189
D31809	18	9	19 x 30	0.655	30	55	260
D31812	18	12	19 x 30	0.735	30	55	420
D31815	18	15	19 x 30	0.819	30	55	449

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances.

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC