


18 AWG - 19x30 Stranded Tinned Copper

Multi-Conductor
Unshielded - 300 Volt
PVC Insulation - 60°C

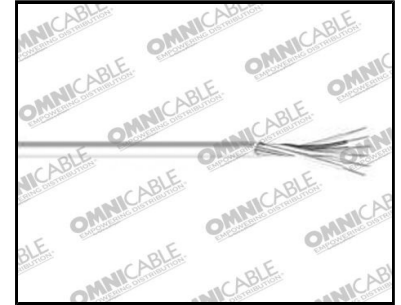

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Tinned copper

Category Insulation Description:

- Polyvinyl Chloride (PVC)

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC) over cabled conductors

Applications:

- Applications include computers, communications, instrumentation, sound, control, audio, and data transmission
- Designed to protect signal integrity under critical conditions by reducing hum, noise, and crosstalk

Standards:

- UL Listed: 60°C
- Voltage: 300 Volt

| Color Code Chart | |
|------------------|--------|
| # of Conductors | Color |
| 1 | Black |
| 2 | White |
| 3 | Red |
| 4 | Green |
| 5 | Brown |
| 6 | Blue |
| 7 | Orange |
| 8 | Yellow |
| 9 | Purple |

| | |
|----|------|
| 10 | Gray |
| 11 | Pink |
| 12 | Tan |

Part Number Table

| Part# | Gauge | Conductors | Stranding | Insulation Thickness | Jacket Thickness | Outside Diameter Inches | Material Weight (Lbs./M') |
|--------|-------|------------|-----------|----------------------|------------------|-------------------------|---------------------------|
| D91802 | 18 | 2 | 7x26 TC | 0.014 | 0.032 | 0.188 | 17 |
| D91803 | 18 | 3 | 19x30 TC | 0.017 | 0.032 | 0.235 | 34.8 |
| D91804 | 18 | 4 | 19x30 TC | 0.017 | 0.032 | 0.254 | 39 |
| D91805 | 18 | 5 | 19x30 TC | 0.017 | 0.033 | 0.29 | 60 |
| D91806 | 18 | 6 | 19x30 TC | 0.017 | 0.033 | 0.289 | 60 |
| D91807 | 18 | 7 | 19x30 TC | 0.017 | 0.037 | 3.23 | 81 |
| D91808 | 18 | 8 | 19x30 TC | 0.017 | 0.037 | 0.339 | 79.9 |
| D91809 | 18 | 9 | 19x30 TC | 0.017 | 0.037 | 0.358 | 87.7 |
| D91810 | 18 | 10 | 19x30 TC | 0.017 | 0.04 | 0.362 | 97.9 |
| D91812 | 18 | 12 | 19x30 TC | 0.017 | 0.04 | 0.424 | 131.4 |
| D91815 | 18 | 15 | 19x30 TC | 0.017 | 0.045 | 0.48 | 175 |
| D91819 | 18 | 19 | 19x30 TC | 0.017 | 0.045 | 0.49 | 172 |
| D91820 | 18 | 20 | 19x30 TC | 0.017 | 0.045 | 0.511 | 199.1 |
| D91825 | 18 | 25 | 19x30 TC | 0.017 | 0.06 | 0.55 | 211.6 |

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances. *Ring Band Striping

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •

St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC