


## 18 AWG – Multi-Pair – Plenum Jacket

Individually Shielded Pairs  
Aluminum/Mylar Shield  
Plenum Rated  
Plenum

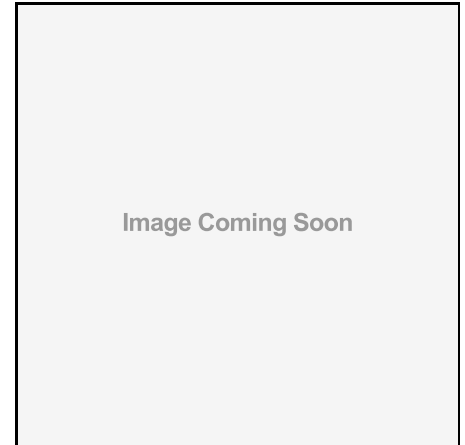

### Category Conductor Description:

- Stranded bare copper

### Category Insulation Description:

- Low smoke Polyvinyl Chloride (PVC)

### Category Jacket Description:

- Plenum, low smoke Polyvinyl Chloride (PVC)

### Standards:

- CMP/CL3P

### Shield Drain:

- Aluminum/Mylar shielded pairs with one drain wire per pair

### Applications:

- Signal and control applications

Part Number Table

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
G151802	18	2	7x26	0.009	0.014	0.186	37.7
G151803	18	3	7x26	0.009	0.014	0.264	66

Note: The data shown are approximate and subject to standard industry and manufacturer tolerances.

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco •  
Seattle • St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC