


22 AWG - 7x30 Stranded Tinned Copper - Polyethylene

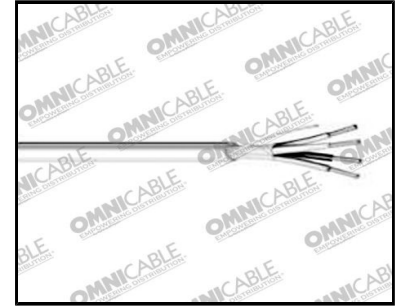

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Tinned copper

Category Insulation Description:

- Polyethylene (PE), conductors cabled

Shield Drain:

- Aluminum-polyester shield Tinned copper drain wire with 100% shield coverage

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Applications:

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise

Standards:

- CEC CM
- NEC CM
- Working Voltage: 300 Volt

Color Code Chart	
# of Conductors	Color
1	Black
2	Clear
3	Red
4	Green

Part Number Table

Part#	Gauge	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
D12203	22	3	7x30 TC	0.016	0.033	0.196	20

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC