


## 24 AWG – 7×32 Stranded Tinned Copper – Fluoropolymer

**Stranded Tinned Copper  
Twisted Pairs  
Fluorocopolymer Jacket**

**Security and Alarm Cable**

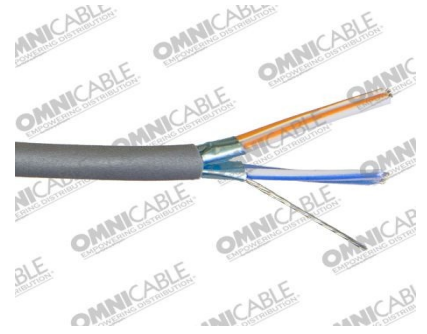

\*Product images are for illustrative purposes only and may differ from the actual product.

### Category Conductor Description:

---

- Stranded tinned copper with overall foil shield

### Category Insulation Description:

---

- Foam Fluoropolymer

### Shield Drain:

---

- Individual aluminum/polyester foil shield with 100% coverage

### Category Jacket Description:

---

- Gray, Fluoropolymer

### Applications:

---

- Used for computers, communications, instrumentation, sound, control, audio, and data transmissions
- Designed to protect signal integrity under critical conditions by reducing noise
- Features include low dielectric constant and a dissipation factor for high speed, low distortion data handling
- Physical properties include good crush resistance and light weight

### Standards:

---

- CMP/CL2P
- 150°C temperature rating

**PART NUMBER TABLE**

Part#	Gauge	Pairs	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Nominal Capacitance	Material Weight (Lbs./M')
G62402	24	2	7x32	0.015	0.017	0.189	11.8 pF/ft.	24.3
G62403	24	3	7x32	0.015	0.02	0.261	11.8 pF/ft.	40

Note: The data shown are approximate and subject to standard industry and manufacturer tolerances.

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: [omnicable.com](http://omnicable.com)  
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco •  
Seattle • St. Louis • Tampa • Toronto  
© 2020 Omni Cable LLC